



# CRIMAC CRUISE REPORT: DEVELOPMENT OF ACOUSTIC AND OPTIC METHODS FOR UNDERWATER TARGET CLASSIFICATION

G.O. Sars 22.11 - 03.12 2022

Cruise leader(s): Nils Olav Handegard and Maria Tenningen (IMR)

TOKTRAPPORT  
No.3 2023



**Title (English and Norwegian):**

CRIMAC cruise report: Development of acoustic and optic methods for underwater target classification  
CRIMAC toktrappot: Utvikling av akustiske og optiske metoder for klassifisering av undervannsorganismer

**Subtitle (English and Norwegian):**

G.O. Sars 22.11 - 03.12 2022  
G.O. Sars 22.11 - 03.12 2022

<b>Report series:</b>	<b>Year - No.:</b>	<b>Date:</b>
Toktrappot	2023-3	09.03.2023
ISSN:1503-6294		

**Author(s):**

Nils Olav Handegard, Maria Tenningen (IMR), Leif Bildøy (KM), Jon Even Corneliussen (KM), Kameran Esmail (KM), Jens Heinsdorf (KM), Babak Khodabandeloo, Rolf Korneliussen, Rokas Kubilius, (IMR), Eirik Svoren Osborg (Scantrol DV), Ahmed Pala (UiB), , Shale Pettit Rosen, Jostein Saltskår, Erik Schuster (IMR), Ingrid Ulset (NR) and Taraneh Westerglerling (UiB)

Research group leader(s): Rolf Korneliussen (Økosystemakustikk)  
Approved by: Research Director(s): Geir Huse Program leader(s): Frode Vikebø

**Cruise leader(s):**

Nils Olav Handegard and Maria Tenningen (IMR)

**Distribution:**

Open

**Cruise no.:**

2022115

**Project No.:**

15662

**On request by:**

Norges Forskningsråd

**Oppdragsgivers referanse en:**

309512

**Program:**

Marine prosesser og menneskelig påvirkning

**Research group(s):**

Økosystemakustikk  
Fangst

**Number of pages:**

52

**Partners**

Scantrol Deep Vision, Kongsberg Maritime, Norges Regnesentral



UNIVERSITY OF BERGEN

**Summary (English):**

Hovedmålet med toktet var å samle data som støtter aktiviteter i CRIMAC senteret og LoVe observatoriet. Toktet ble gjennomført med forskningsfartøyet G.O. Sars 26.11 - 3.12.2022 i overvintringsområdene til norsk vårgytende sild i fjordene og kysten ved Troms. Første del av toktet fokuserte på videreutvikling og testing av Scantrol Deep Vision trålkamera inkludert dataprosessering, testing og utvikling av Kongsberg Maritimes trål posisjoneringssystem og målinger av fisk og atferd foran og i trålen ved bruk av kombinerte akustiske og optiske metoder. Andre del av toktet fokuserte hovedsakelig på bredbåndsakustiske data. Aktivitetene inkluderte størrelsesestimering av fisk ved bruk av bredbåndsakustikk, måling av støy og kalibrering av bredbåndsakustiske systemer, overgang fra smal til bredbåndsddata i rutine tokt, akustisk deteksjon av gasslekasje, samt gjennomføring av standard HI LoVe transekt. Med på toktet var 18 forskere og teknikere fra HI og CRIMAC partnerne Scantrol Deep Vision AS, Kongsberg Maritime AS, Universitetet i Bergen og Norsk Regnesentral.

**Summary (Norwegian):**

The overall aim of the survey was to collect data to support the CRIMAC center activities and the LoVe observatory. The survey was carried out on board GO Sars between the 26th of november and 3rd of December 2022 in the fjords and coastal areas off Troms including the overwintering areas of Norwegian spring spawning herring. The first part of the survey focused on further development of in trawl camera systems and data processing from such systems, testing and developing a trawl positioning system and fish detection and behavioural studies in front and inside the trawl using combined acoustic and optic methods. The second leg of the survey focused mainly on broadband acoustic data, including sizing of fish using broadbanded acoustics, noise estimation, calibration, time series consistency when changing to broad band acoustics, gas seep detection as well as performing the standard IMR LoVe transect. Eighteen scientists and technicians participated in the survey representing CRIMAC partner institutes Scantrol Deep Vision AS, Kongsberg Maritime AS, University of Bergen and Norsk Regnesentral in addition to IMR.

# Content

<b>1</b>	<b>Introduction</b>	5
<b>2</b>	<b>Survey overview</b>	6
2.1	Time period and area	6
2.2	Data collection	6
2.3	Vessel details	7
2.4	Cruise participants	8
<b>3</b>	<b>Activities part I</b>	9
3.1	Detecting and measuring individual fish inside the trawl with combined camera and acoustic methods	10
3.2	Processing data from Deep Vision camera system	12
3.3	Monitor herring school reactions to the vessel and trawl with multibeam fisheries sonar	15
3.4	Fish behaviour from trawl opening to codend	17
3.5	Test and develop the commercial fisheries version of the Deep Vision camera system	19
3.6	Test and develop trawl door positioning system	20
<b>4</b>	<b>Activities part II</b>	23
4.1	Ship mounted Simrad EK80 Echosounder settings and calibration	23
4.2	Simrad EC150-3C ADCP calibration	28
4.3	EC150-3C operation as echosounder	30
4.4	Node 7 EK80 echosounder calibration	32
4.5	Noise observations	32
4.6	FM to CW comparisons	34
4.7	Remote acoustic sizing of herring	36
4.8	LoVe transect	43
4.9	Broadband gas seep detection and quantification	47
<b>5</b>	<b>References</b>	49
<b>6</b>	<b>Data organization</b>	50

# 1 - Introduction

The overarching objective of the survey is to collect data to support the CRIMAC activities and to collect data for the LoVe observatory. CRIMAC is a center of research-based innovation funded by the research council of Norway through their center for research-based innovation program (SFI). Sustainable, healthy food production and clean energy production for a growing population are important global goals, and CRIMAC will contribute to these by obtaining accurate underwater observations of gas, fish, nekton and other targets. The data will be used in conjunction with CRIMAC data from other surveys to build a reference data set for optical and acoustic target classification. The classification libraries will be used for developing methods and products toward the fishing industry and marine science. The survey was divided into two legs where leg one mainly focused on trawl instrumentation and data collection for behavioural studies on fish-trawl interactions. The main objectives of this part were to test in-trawl camera systems and data processing from such systems, test and develop trawl instrumentation and acoustic and optic monitoring of herring behaviour in relation to the trawl. The second leg of the survey focused mainly on broad band acoustic data, including sizing of fish using broad banded acoustics, noise estimation, calibration, time series consistency when changing to broad band acoustics, gas seep detection as well as performing the standard IMR LoVe transect.

## 2 - Survey overview

### 2.1 - Time period and area

The first part of the cruise was conducted between November 22nd and November 26th with departing and ending in Tromsø. The second part was conducted between November 27th and December 3rd starting in Tromsø and ending in Myre. The survey area was inside the Lyngen, Reisa and Kvænangen fjords and along the coast off Tromsø (Figure 1). This includes the overwintering areas of the Norwegian spring spawning herring and a large coastal purse seine fleet were catching herring in the area during the cruise. In the second part of the cruise the LoVe transect was also covered. The major sampling stations, pelagic trawls and CTD as well as the survey track is shown in Figure 1.

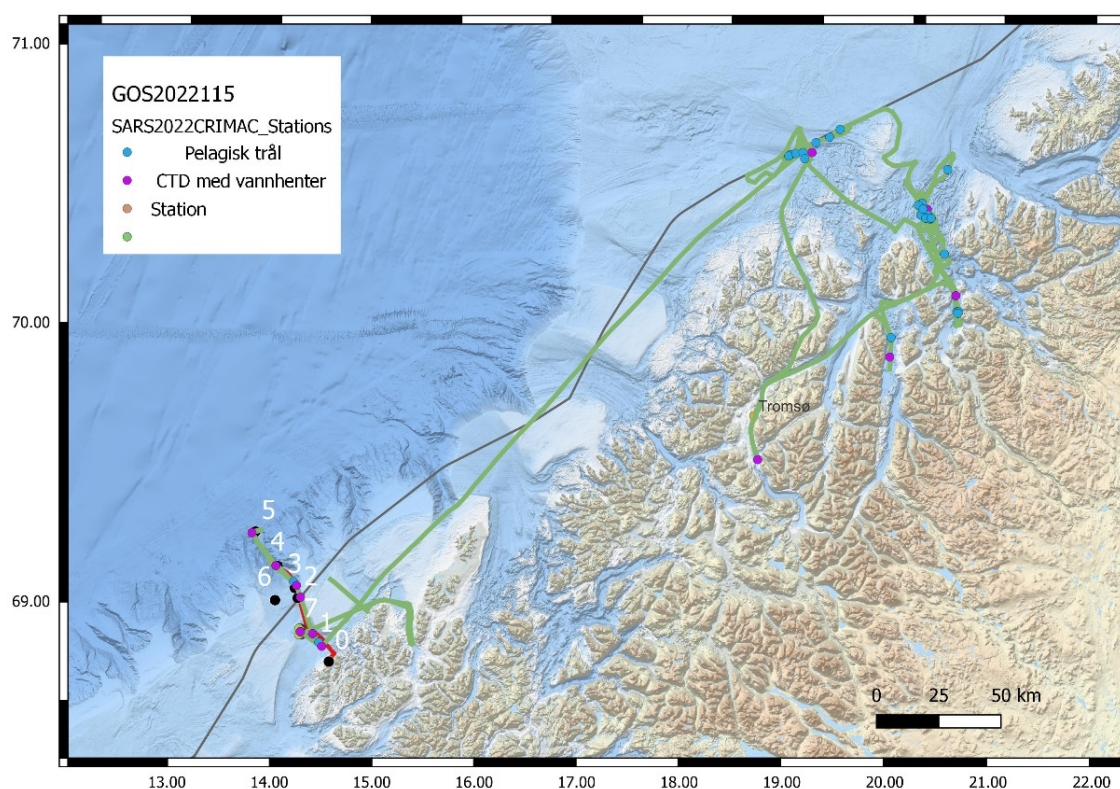


Figure 1. Cruise track and stations (CTD, TS probe, demersal and pelagic trawls).

### 2.2 - Data collection

The IMR Vito pelagic sampling trawl with standard rigging and trawl monitoring instruments was used in all hauls (Figure 2). The trawl was spread with 8 m<sup>2</sup> Thyborøn type 23 trawl doors with holders for both Simrad and Scanmar sensors. The door brackets were adjusted for pelagic trawling, with trawling warps attached to the top hole and bracket in the centre position. A Deep Vision codend (12 m long, 8 mm mesh liner) was used to collect

physical samples. A split was made in the codend to limit catch sizes. The split was 1.3 m in length (2.0 - 3.3 m ahead of the codeline) and sewn loosely closed with a thin twine dimensioned to break when the codend filled. To further limit catch size, constraining ropes were placed around the portion of the codend aft of the split to prevent it from filling completely. For the hauls without physical samples, the codend was simply left open.

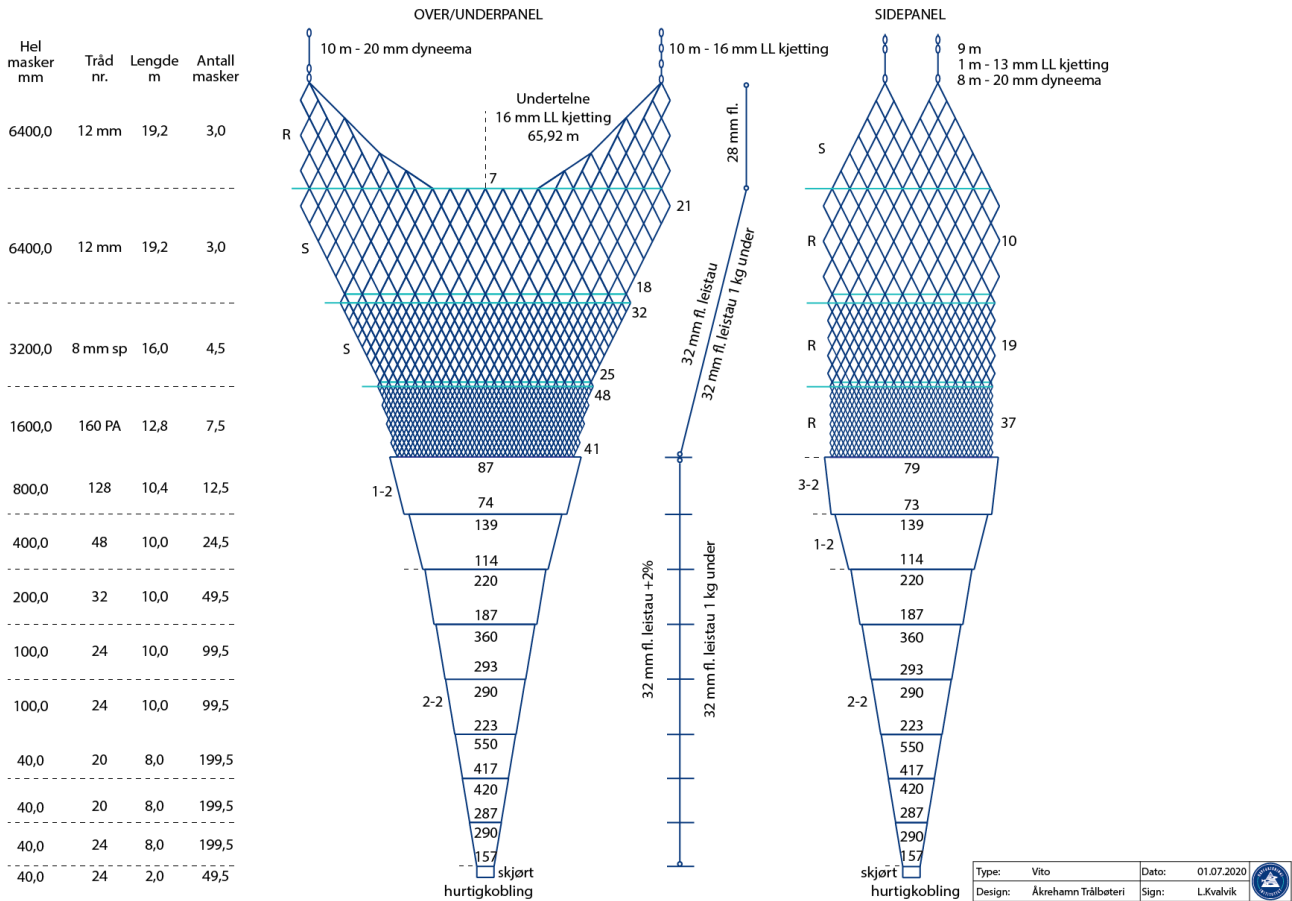


Figure 2. The IMR VITO pelagic sampling trawl was used for trawl experiments and for capturing biological samples.

### 2.3 - Vessel details

The cruise was conducted with RV G. O. Sars (Figure 3) operated by the Institute of Marine Research. The vessel is 77.5 m length overall, has a maximum speed of 17 knots and a crew of 15 in addition to space for 30 scientific crew members including instrument technicians. The vessel is equipped with Kongsberg Maritime EK80 scientific broadband echosounders (operating at 18, 38, 70, 120, 200, and 333 kHz centre frequency) and a range of other sensors (sonars, ADCPs). The vessel is equipped to deploy a wide range of additional equipment (e.g. probes, towed vehicles, pelagic and demersal trawls). More information about the vessel can be found online (<https://www.hi.no/resources/brosjyre-g.o.sars.pdf>).



Figure 3. G. O. Sars (image credit: Institute of Marine Research).

## 2.4 - Cruise participants

Table 1. Scientific crew for the two surveys

Scientific crew 1 <sup>st</sup> part (22 – 26.11)		Scientific crew 2 <sup>nd</sup> part (27.11 – 03.12)	
Maria Tenningen	IMR	Nils Olav Handegard	IMR
Shale Rosen	IMR	Rolf Korneliussen	IMR
Jostein Saltskår	IMR	Geir Pedersen	IMR
Liz Kvalvik	IMR	Babak Khodabandeloo	IMR
Erik Schuster	IMR	Rokas Kubilius	IMR
Taraneh Westergelting	UiB	Leif Bildøy	KM
Eirik Svoren Osborg	Scantrol DV	Ingrid Utset	Norsk regnesentral
Jens Heinsdorf	KM	Ahmet Pala	UiB
Kameran Esmail	KM		
Jon Even Corneliusssen	KM		



### 3 - Activities part I

In the first part of the cruise herring were detected inside the Reisa fjord, outer edges of Kvænagen fjord and offshore at the 12 nm border (Figure 4). Herring were mainly observed in large layers that varied in density and depth. In general, the aggregations were closer to surface (25 – 100 m) and less dense in the evening and night. In the early morning herring density in the aggregations increased and the fish moved deeper (150 – 200 m). Four CTD casts were made in the main areas of trawling. We had in total 20 trawl hauls, five hauls with closed codend to obtain a physical sample of the catch (Table 2). In all trawl hauls the scientific Deep vision Camera system was used for monitoring catch composition. The FOCUS 2 underwater towed vehicle (MacArtney AS) was deployed in two of the hauls to make detailed observations of trawl and trawl instrumentation (e.g. Scantrol DV camera system) performance using the camera and scanning sonar mounted on the vehicle.

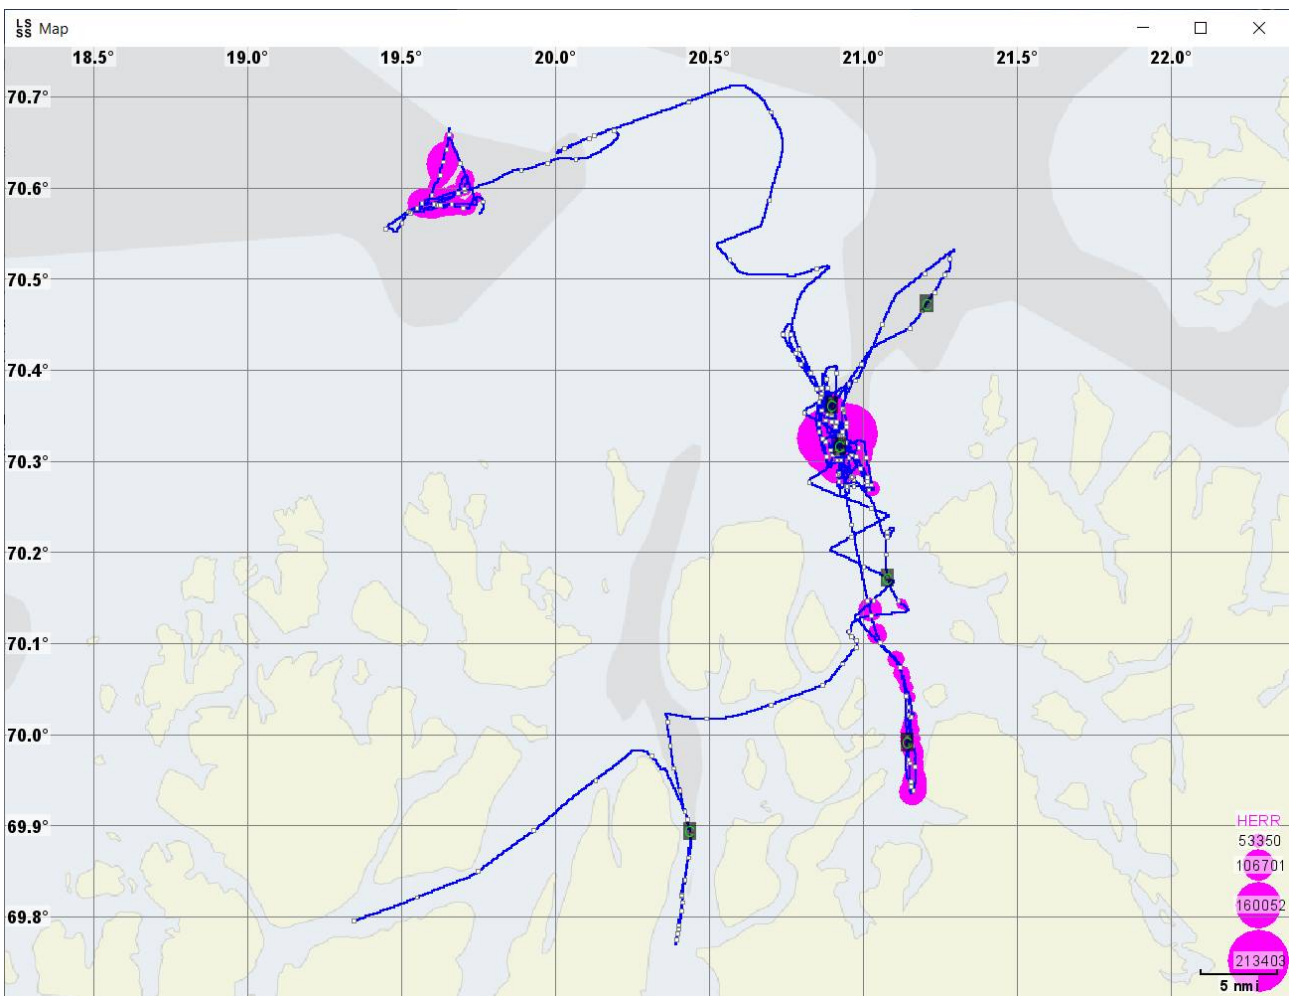


Figure 4. Overview of the survey area in leg 1 (blue line). We covered the Lyngen and Reisa fjords and outer parts of Kvænagen fjord and further off the coast at the 12 nm border. Herring detections are marked as pink bubbles (size reflecting the amount of fish).

Table 2. Overview of trawl hauls and instrumentation in part 1 of the survey.

Haul	Date	Lat (N)	Lon (E)	Time start	Time end	Trawl depth	Instrumentation	Trawl sample (herring)	Comment

							WBAT	Dark Vision	Fisheries DV	Research DV	Focus	L (mm)	W (kg)	
489	22.11	69°54'	20°26'	21:46	23:47	165	X	X	X	X				
490	23.11	70°10'	21°01'	05:27	06:10	120	X	X	X	X		305	0.263	Red light Dark vision
491	23.11	70°22'	20°54'	08:58	09:42	160	X	X		X				
492	23.11	70°19'	20°55'	14:26	15:13	NA	X	X		X				
493	23.11	70°28'	21°12'	18:41	19:42	250			X	X				Fisheris DV malfunction
494	24.11	69°58'	21°09'	03:00	04:07	NA	X	X		X				
495	24.11	69°58'	21°10'	06:31	06:37	65				X		302	0.269	(large herring catch)
496	24.11	70°18'	20°58'	12:17	15:00	NA	X	X	X	X	X			Very good data from the whole trawl
497	24.11	70°19'	20°57'	19:06	19:39	100	X	X		X		270	0.192	Wbat cw
498	24.11	70°21'	20°51'	21:47	22:17	80	X	X		X				
499	24.11	70°19'	20°52'	23:54	00:39	150	X	X		X				First 30 min at 70 m
500	25.11	70°18'	20°55'	06:30	07:00	90	X	X	X	X				
501	25.11	70°20'	20°54'	08:58	09:29	190	X	X	X	X				
502	25.11	70°18'	20°58'	11:12	13:39	170	X		X	X	X			Monitoring fish between doors and trawl wires
503	25.11	70°39'	20°09'	18:47	19:17	84	X	X	X	X				
504	25.11	70°37'	19°58'	20:47	21:17	100			X	X		200	0.083	
505	25.11	70°34'	19°31'	22:41	22:54	72	X	X	X	X		259	0.142	
506	26.11	70°34'	19°30'	00:10	00:39	NA	X	X	X	X				
507	26.11	70°34'	19°35'	05:58	06:47	110	X	X	X	X				First 25 min at 53 m
508	26.11	70°34'	19°42'	08:56	09:13	300	X	X		X				

### 3.1 - Detecting and measuring individual fish inside the trawl with combined camera and acoustic methods

Maria Tenningen (IMR)

#### Objective

The aim of this activity was to first test the feasibility of collecting data using a combination of scientific echosounder and a camera system mounted in the trawl. If this proved successful, the aim was to collect data for acoustic measurements of individual fish length and validate the acoustic data with in-trawl camera images. In pelagic fisheries target schools are usually monitored with sideways looking sonar and being able to estimate

fish length before catch would be very useful when making decision before catch.

**Method**

An autonomous wideband transceiver, Simrad WBAT (KM) with a 200 kHz wideband transducer (160 – 270 kHz) was attached in the trawl (Figure 5). The wbat was placed inside a protective housing and attached in the vertical center of the starboard side panel of the Vito sampling trawl at the junction between 400 and 800 mm meshes. The trawl opening in this position was measured to be 19.5 m horizontal and 8 m vertical (FOCUS sonar measurement). On the opposite side of the trawl the "Dark Vision" (IMR) camera system was attached (Figure 5). This is a camera system based on existing modules, built to be light sensitive and programmable to collect video or images as needed (pers. comm. Sigurd Hanaas, IMR). In the first hauls red light was used not to disturb the fish, but due to very poor visibility we removed the red light filter and used white light for better range visibility (Table 2). The times of the wbat and camera system were synchronized. Data were collected in 17 hauls with different densities of fish, mainly herring but also saithe, mesopelagic, shrimp etc. The Deep vision camera collected image data further back in the trawl. Wbat settings are presented in table 3.

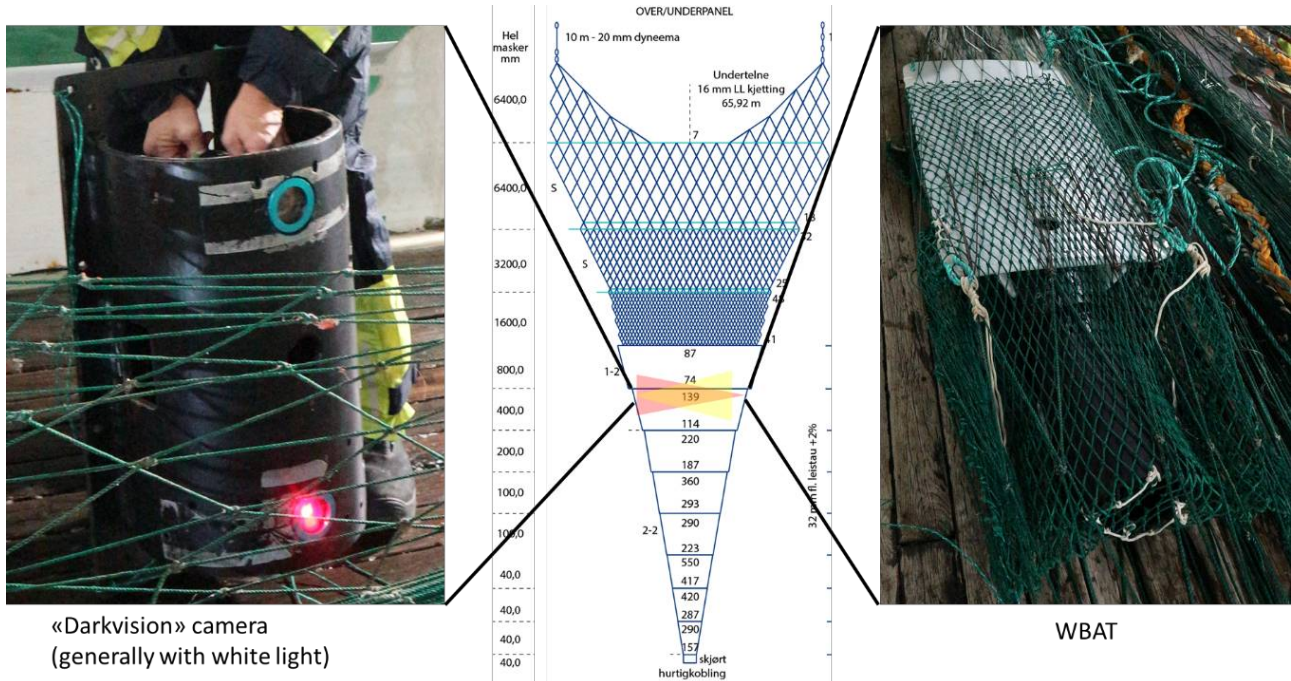


Figure 5. Dark vision camera (Left) and WBAT placement in VITO trawl. Trawl diagram at centre indicates view from above.

Table 3 . Wbat settings.

Pulse form	Bandwidth, kHz	Taper	Pulse duration, ms	Power, W	Ping rate	Range	Hauls
FM-up	170 – 260	Fast	2.048	105	0.5	25	All except 493, 495, 497, 504
CW	200	Fast	0.256	75		25	497

**Preliminary results**

Based on a preliminary data scrutiny it is clear that individual targets can be detected in the acoustic data and fish are also clearly observed in the camera images (Figure 6). However, fish densities varied greatly between hauls and in the most dense concentrations it may be difficult to detect individual fish. The dark vision camera did also not cover the whole range across the trawl and with the red light visibility was very poor. The white light provided better visibility, but may have affected the fish behaviour by attracting the fish close to the camera. A better solution to using the dark vision camera may be to use the data from the scientific deep vision further back in the trawl. The next step is to calibrate the wbat, then investigate the quality of the acoustic data and number of targets that can be detected. We will then decide how to continue with this work.

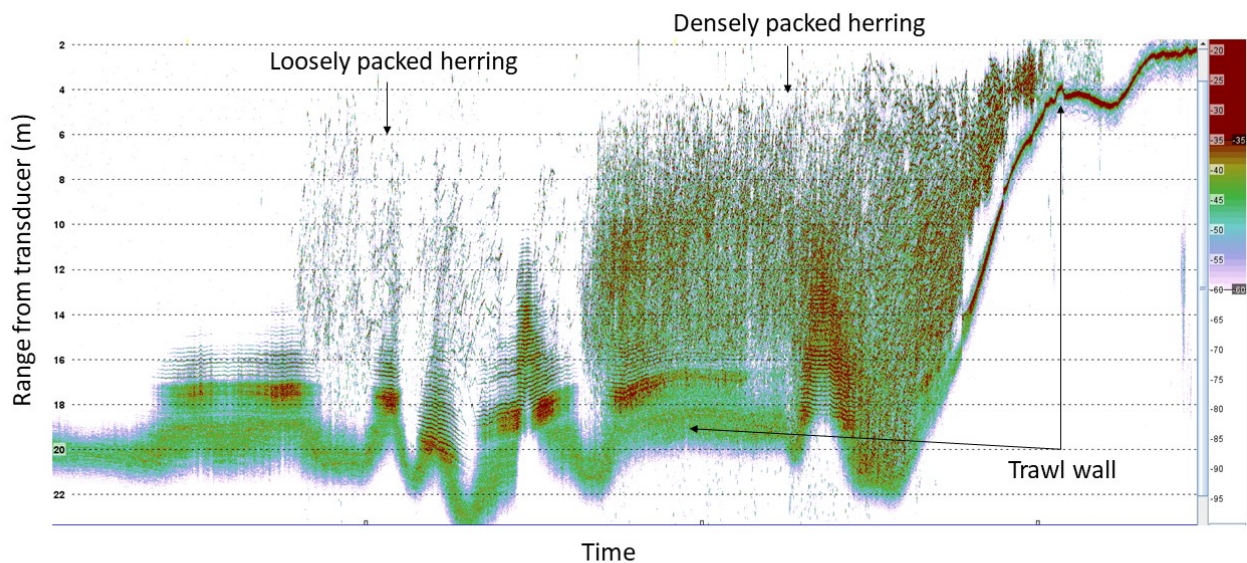


Figure 6. Example of data collected with the wbat mounted in the trawl

## 3.2 - Processing data from Deep Vision camera system

Taraneh Westerglerling (UIB)

### Objective

The Deep Vision system is planned to be used in some of IMRs stock assessment surveys. During these cruises, the instrument personnel and crew carry full responsibility for the data collection. In the past years, programmers from both Scantrol Deep Vision and IMR have worked on automating and speeding up the download process with the goal of utilizing the images during acoustic scrutinization. To ensure the applicability of the pipeline it is essential for it to run smoothly and not limit further data collection.

### Method

A total of 20 Deep Vision sessions were recorded. From these 15 were collected using the standard settings (filtered, zipped, 10 fps, half resolution, no keyframes), 2 were recorded with full resolution, and 3 were

unzipped and with full resolution (Table 4).

Attempts to run the full pipeline (download, post-processing, docker, export to LSSS, delete after download) failed. There were two main reasons for this: The first reason was that the docker, that contains the species identification algorithm, was estimated to take 8h for each session. This was irrespective of file size.

Consequently, we needed to remove that step from the pipeline. The second reason was that the “delete after download” box was not checked, this led to the deleting of unprocessed sessions on the topside PC. All sessions recorded from the first leg of the survey did therefore not run through the object detection network built by Allken et al. (2019).

The download time and post-processing time were recorded for all 17 zipped sessions, by observing the Topside HMI interface or by tracking the time stamp when the folders were created.

*Table 4. Deep vision sessions overview: Includes the settings used to during data collection, the steps of the pipeline which were completed as well as the size of each session and the number of files which were produced*

Station	Session	File size (GB)	Number of files	Settings					Pipeline steps		
				Filter	Zip	Frames per second (fps)	resolution	Keyframes	Download	Post-processing	Docker
489	20221122T1928Z	NA	NA	no	unzipped	10	full	0	NA	NA	NA
490	20221123T0409Z	NA	NA	no	unzipped	10	full	0	NA	NA	NA
491	20221123T0813Z	NA	NA	no	unzipped	10	full	0	NA	NA	NA
492	20221123T1347Z	53.7	563	yes	zipped	10	full	0	yes	yes	no
493	20221123T1810Z	51.6	562	yes	zipped	10	full	0	yes	yes	no
494	20221124T0225Z	16	618	yes	zipped	10	half	0	yes	yes	no
495	20221124T0606Z	12.1	355	yes	zipped	10	half	0	yes	yes	partial
496	20221124T1137Z	29.1	1135	yes	zipped	10	half	0	yes	yes	partial
497	20221124T1825Z	12.9	507	yes	zipped	10	half	0	yes	yes	partial
498	20221124T2048Z	14.8	547	yes	zipped	10	half	0	yes	yes	no
499	20221124T2320Z	15.5	507	yes	zipped	10	half	0	yes	yes	no
500	20221125T0545Z	15.4	563	yes	zipped	10	half	0	yes	yes	no
501	20221125T0817Z	13.3	515	yes	zipped	10	half	0	yes	yes	no
502	20221125T1033Z	28	1030	yes	zipped	10	half	0	yes	yes	no
503	20221125T1803Z	11.9	479	yes	zipped	10	half	0	yes	yes	no
504	20221125T2025Z	8.88	355	yes	zipped	10	half	0	yes	yes	no
505	20221125T2211Z	8.17	327	yes	zipped	10	half	0	yes	yes	partial
506	20221125T2340Z	14.9	814	yes	zipped	10	half	0	yes	yes	no
507	20221126T0522Z	12.9	515	yes	zipped	10	half	0	yes	yes	no
508	20221126T0816Z	12.1	495	yes	zipped	10	half	0	yes	yes	no

**Preliminary results**

Since the Deep Vision system is used on both G. O. Sars and other vessels which do not host a pipeline there is a risk that camera settings are not kept constant. This was the case with the first 3 sessions that were collected in an unzipped format.

It is important to note that for now standard settings must be kept in order to run the pipeline smoothly Figure 7.

Download speed varied between stations and did not depend on file size Figure 8(A). It is not yet clear what lead to the extremely quick downloads of less than 4 minutes Figure 8(B). Post-processing on the other hand showed a clear correlation with file size Figure 8(B).

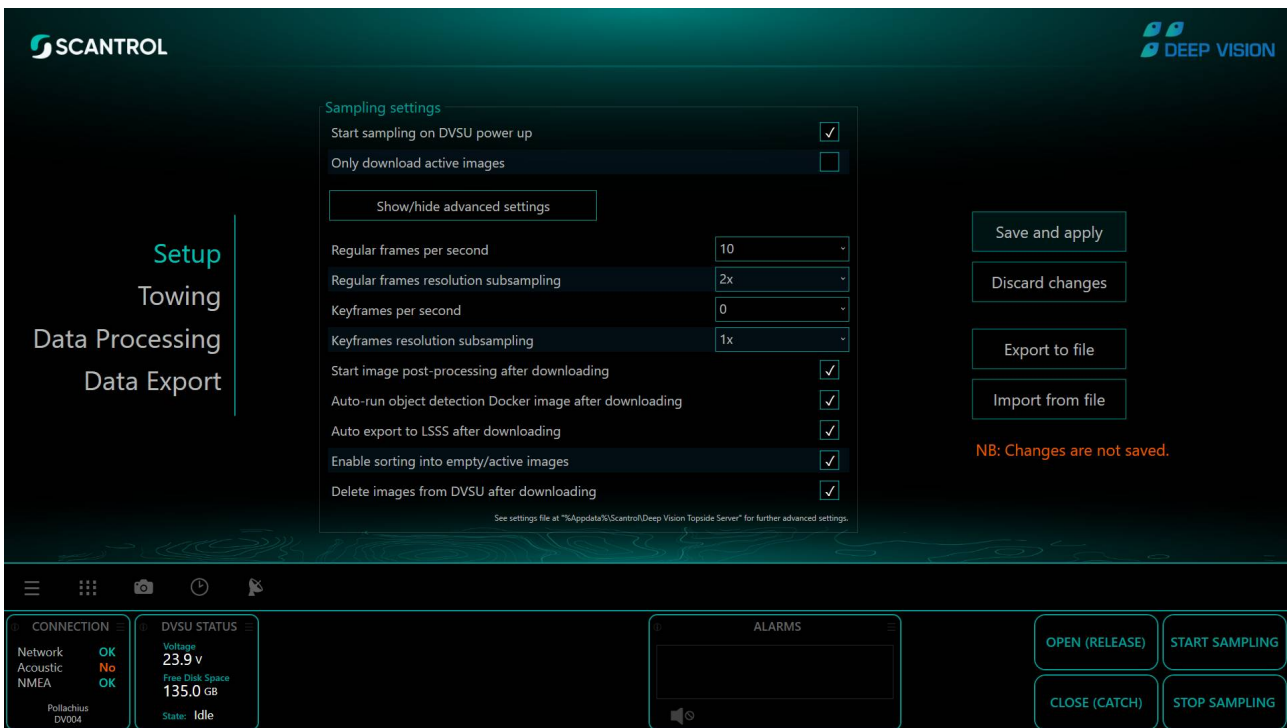


Figure 7. Standard settings selected in "Deep Vision Topsite HMI"

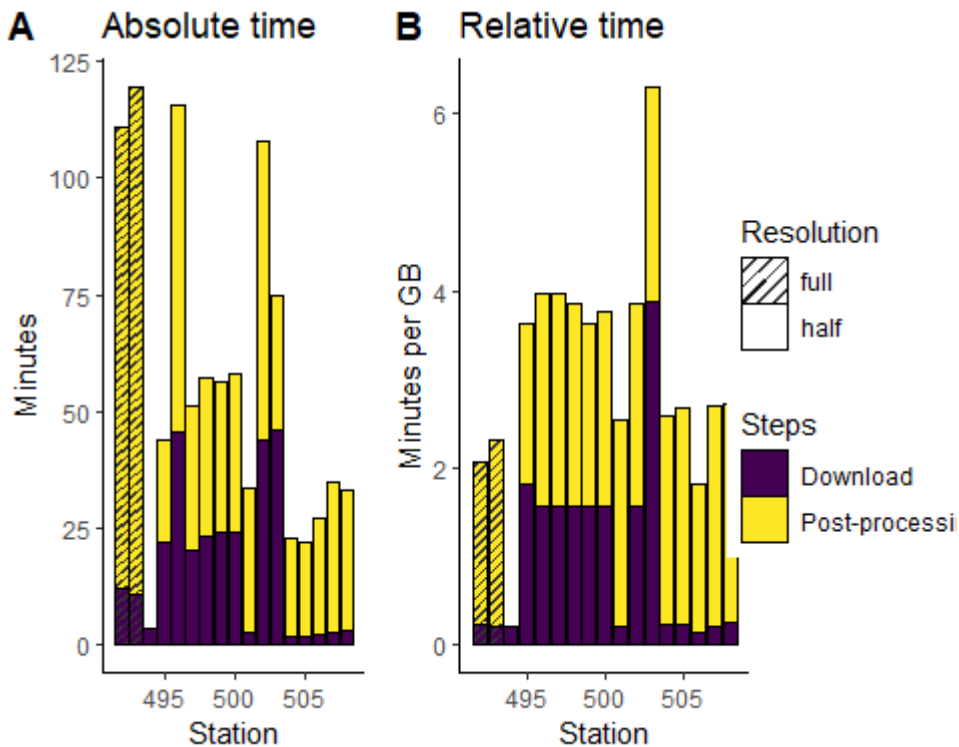


Figure 8: Pipeline duration: (A) Absolute time spent on downloading and post-processing; (B) Relative time per gigabyte spent on downloading and post-processing.

### 3.3 - Monitor herring school reactions to the vessel and trawl with multibeam fisheries sonar

Maria Tenningen (IMR)

#### Objective

The objective of this activity was to collect sonar data for describing how herring schools react to the vessel and the trawl. This activity is related to trawl positioning systems (section 3.6.) and an MSc project that aims to investigate how accurately acoustic registrations in scientific surveys are sampled by trawl with the following sub-objectives:

1. Describe school behaviour (relative density, school speed, depth and swimming direction) ahead of boat and between boat and trawl opening
2. Can we identify environmental or biological factors that affect behaviour (e.g. school size, individual size, school depth, weather, ambient light)?
3. Can better control of trawl position relative to fish school improve catch success?

#### Method

Data were collected with the Simrad SU90 fisheries sonar. A search range of 800 -1000 m was used and once an aggregation of herring was detected on the sonar the vertical beams were directed toward the fish aggregation to obtain depth distribution. The aggregation was then followed as G.O. Sars passed over the fish and in most cases trawled on the fish. The plan is to analyse the data to investigate whether the vertical

distribution, acoustic backscatter strength (indicating a change in fish density or behaviour) or swimming direction changes first as the vessel passes over the school and then as the trawl targets the aggregation. The sonar based behavioural data can then be combined with biological information on length distribution and school size and information about trawl position.

### Preliminary results

Several large herring schools or aggregations were monitored with the sonar (Figure 9). Some of the schools were also passed over by the boat and trawled on. The schools were monitored with the horizontal and vertical beams (Figures 9 and 10). The data can be used to investigate changes in depth and in acoustic backscatter strength (indication of spatial density and / or behaviour) as the vessel passes over the school and when the trawl approaches. However, it was challenging to follow the large layers and this activity would work better on smaller distinct schools.

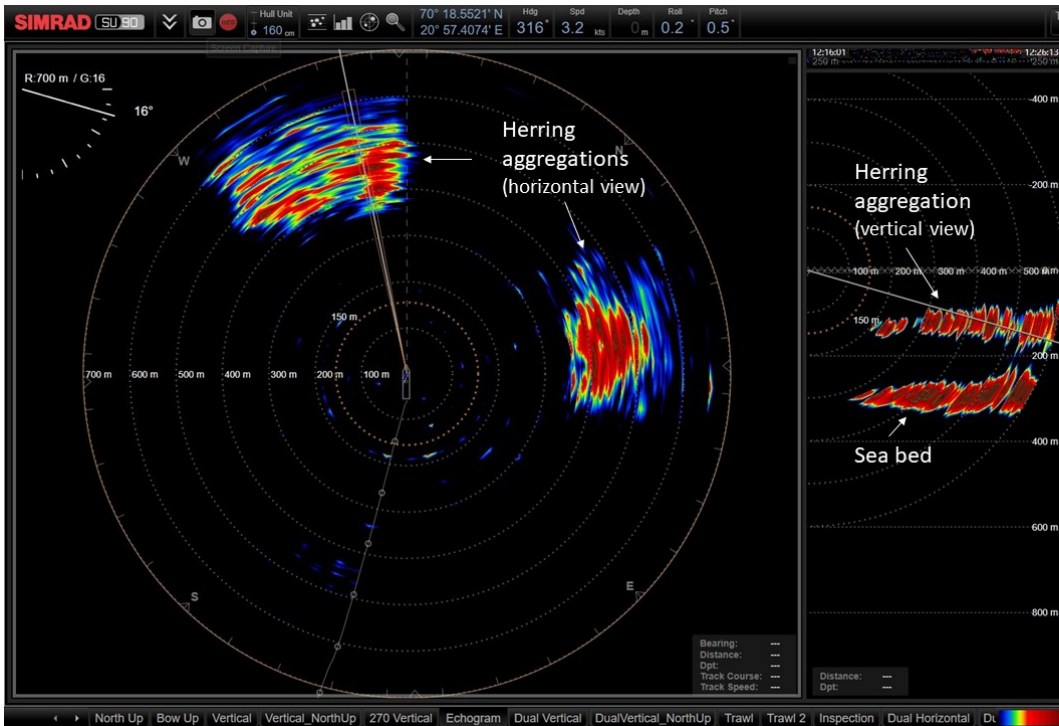


Figure 9. Herring schools monitored ahead of the vessel in the horizontal and vertical beams of the fisheries multibeam sonar (Simrad SU90).



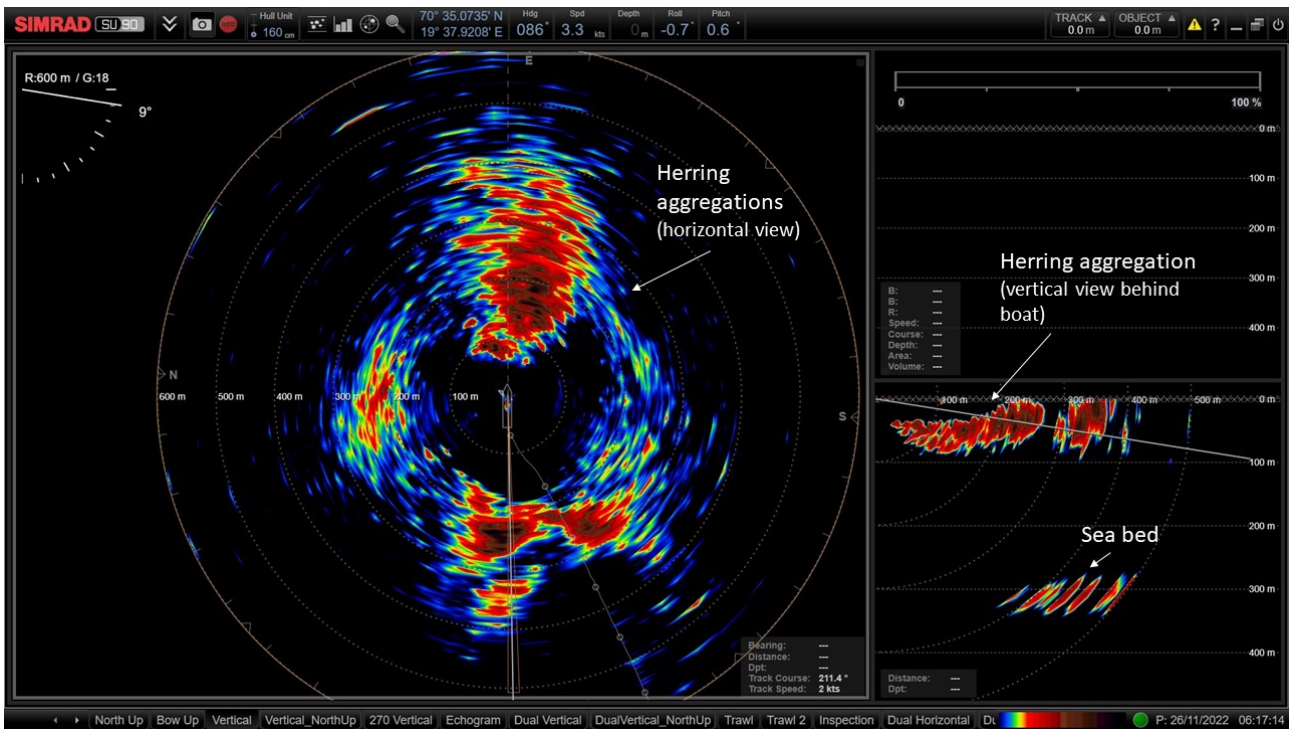


Figure 10. Herring school monitored around the vessel in the horizontal and vertical beams (pointing behind the vessel) of the fisheries multibeam sonar (Simrad SU90).

### 3.4 - Fish behaviour from trawl opening to codend

Shale Rosen (IMR)

#### Objective

The aim of this activity was to establish the passage rates of fish in front of and through the trawl. This is important when considering how the trawl's path and images are integrated with echograms. Presently, the trawl path is positioned based upon average distance behind the vessel and assumes that fish are passive (neither swim with nor against the direction of trawling direction). This is in some ways an extension of the activity to monitor school behaviour between the boat and trawl opening. It was similarly challenged by lack of suitable fish aggregations (small, distinct schools).

#### Method and preliminary results

An experiment was carried out 25.11 (station PT where the FOCUS2 towed vehicle was positioned between the trawl doors and its scanning sonar was used to detect passing schools. The leading and trailing edges of the schools were detected again at the trawl opening using a Scanmar trawley and should be visible again in the WBAT and both Deep Vision systems (Figure 11). Lights on the FOCUS were turned off and the Darkvision camera system was not used in conjunction with the WBAT in order to minimize the effect of artificial light (lights necessary for Deep Vision systems).

The echogram from the Scanmar trawley is not recorded and the Simrad trawl eye could not be used due to interference with the WBAT (both operate at 200 kHz and interference was confirmed during earlier hauls). Therefore, the timing of entrances on the Scanmar trawley were noted manually and documented by photographing the display.

It is unlikely that there is sufficient data for a full analysis to support this investigation at all of the locations. However, there is likely sufficient data to carry out an analysis of passage rates inside the trawl from the position of the WBAT (58 m into trawl) to the research Deep Vision (125 m into the trawl). This encompasses the aft 53 % of the trawl from headrope to beginning of the codend. Since analysis of passage times in WBAT and Deep Vision systems were not carried out, no preliminary results are available beyond those presented in Table 5.

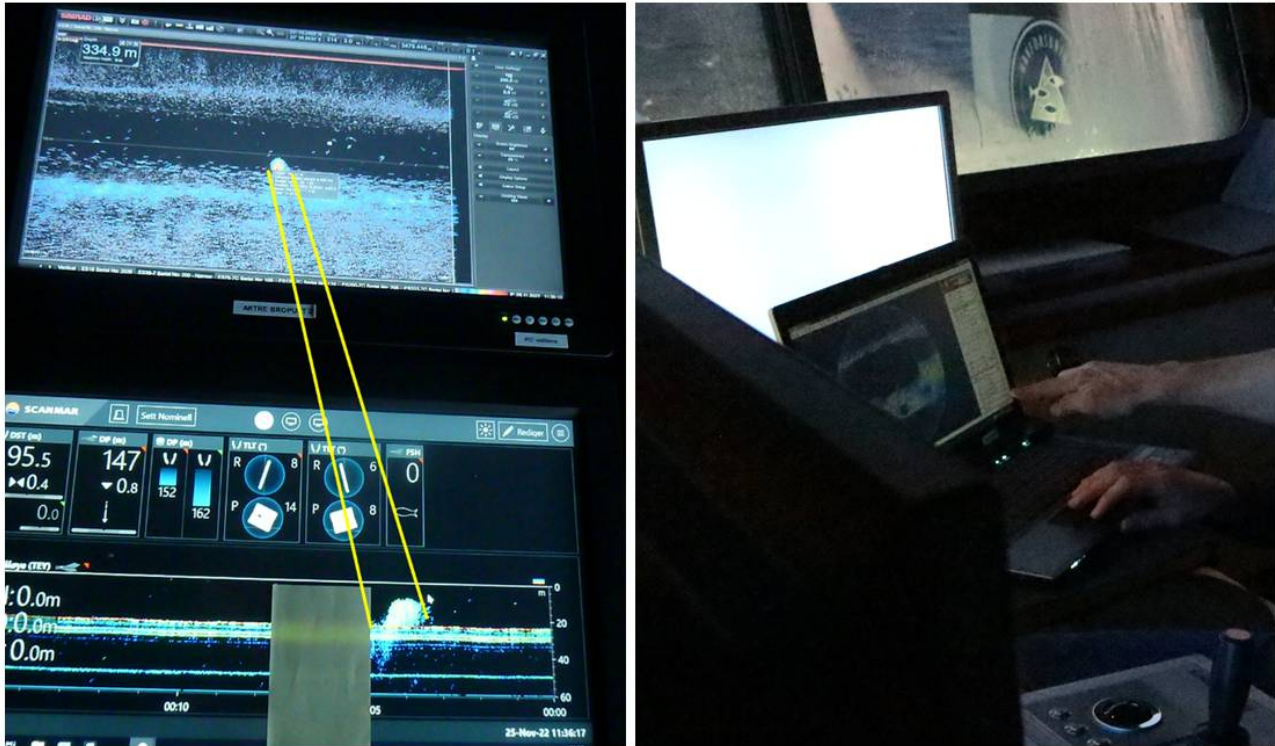


Figure 11. A herring school monitored with the EK80 echosounder under the vessel, with the scanning sonar on the FOCUS underwater vehicle placed between the trawl doors and by the scanmar trail eye attached to the headline of the trawl.

Table 5. Overview of herring schools monitored from first detection to trawl codened.

School number	SU90 sonar	EK80	FOCUS at trawl doors	Trawleye	WBAT	Fisheries Deep Vision	Research Deep Vision
	In front of vessel	Beneath vessel	Trawl doors (90 m ahead of trawl entrance)	Trawl entrance	58 m into trawl	118 m into trawl	125 m into trawl
1				11:09:26-11:16:17	Data not analyzed (not available in real-time)		
2	11:24:15 (300 m range)	11:27:20		11:31:50-11:42:50			
3	12:13:05 (400 m range, 130 m depth)	12:20:37	12:24:05	12:24:36			

### 3.5 - Test and develop the commercial fisheries version of the Deep Vision camera system

Eirik Svoren Osborg (Scantrol DV)

#### Objective

A prototype for the Deep Vision Fisheries version was made ready for the CRIMAC survey in the fjords around Tromsø. The aim during the survey was to collect in-trawl images with a prototype Deep Vision system for knowledge and testing to the coming Deep Vision system for commercial fisheries. In addition to image collecting, Scantrol Deep Vision AS were also gathering information about how such a system can be designed for easy handling when shooting and heaving and positioning in the trawl.

#### Method

The Deep Vision Fisheries prototype camera system was built into a jig with lights and batteries and mounted in the middle of the last section of the VITO pelagic trawl (Figure 12). Different camera settings, light angles and intensities were tested. On some trawl stations, a fine mesh white netting was also installed on the panel opposite of the camera system to compare light and image differences.

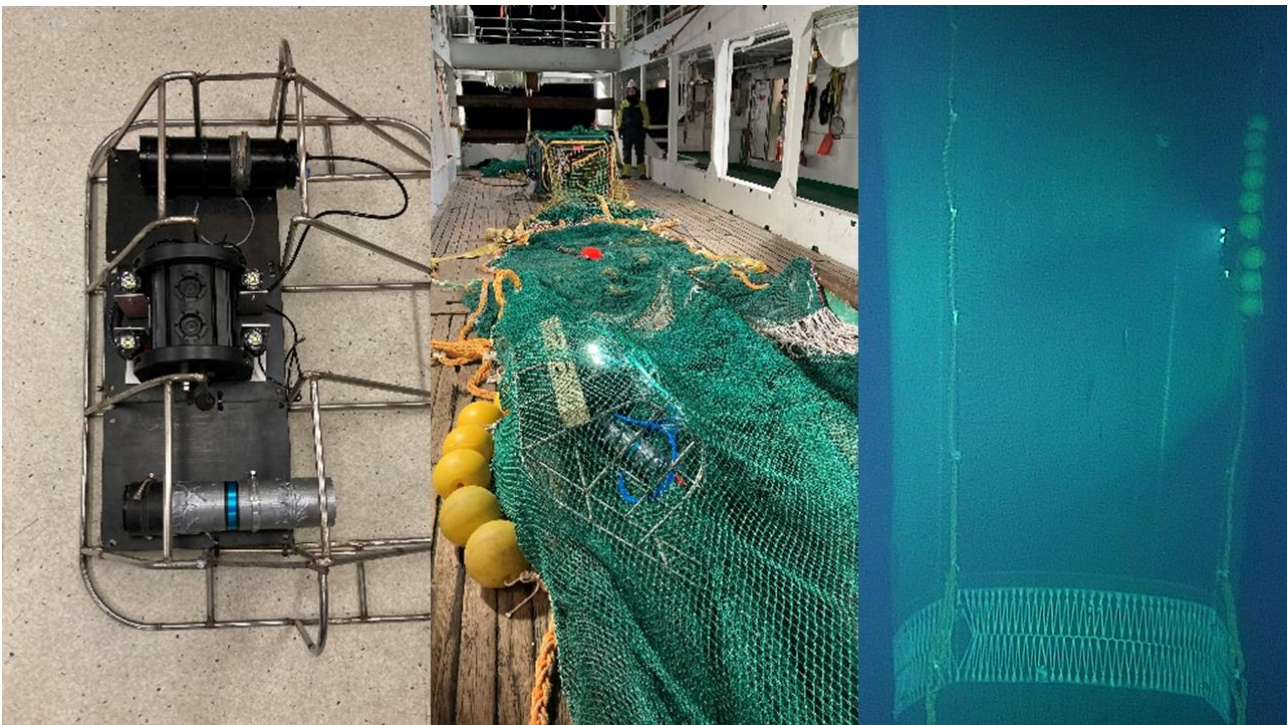


Figure 12. Fisheries Deep Vision system. Left: frame with camera and lighting system. Centre: mounting inside trawl (middle of last section of 40 mm mesh). Right: image from FOCUS towed vehicle during trawling.

#### Preliminary results

The prototype was used to collect images on ten trawl stations. Three of these were with a white background, and the rest without any addition to the trawl. The images have been collected and will be further compared. However, a brief look through the images tells us that we have images of Atlantic Herring, Saithe and a few Cod

that can be compared to images from the scientific Deep Vision model (Figure 13).

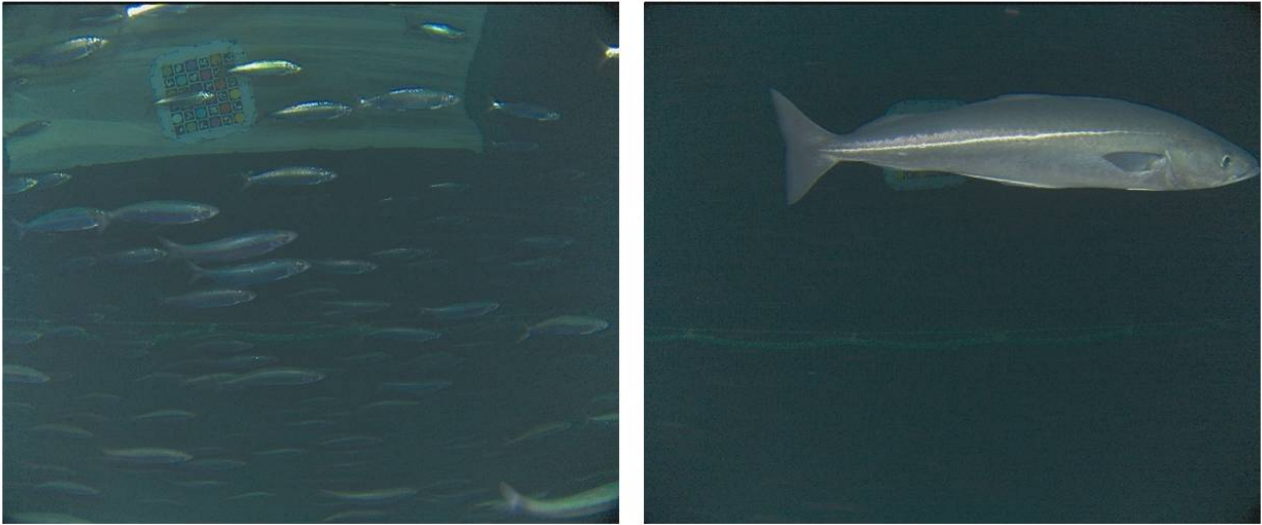


Figure 13. Herring (to the right) and a saithe (to the left) observed with the commercial fisheries version of the Deep Vision camera system. 9 x 8-inch floats (22.5 kg buoyancy) were attached to the lace directly above the fisheries Deep Vision system.

### 3.6 - Test and develop trawl door positioning system

Jens Heinsdorf (KM)

#### Objective

Knowing the location of the gear can be beneficial for fishing in several ways. Knowing the exact location of the trawl can help fishers target their fishing efforts more effectively. This can help them catch the right species of fish, at the right size and in the right quantities. Furthermore, knowing the location of the trawl gear in relation to the vessel can be an aid to safe navigation. The trawl might not always be in the same direction as the direction in which the warps leave the vessel. In e.g., areas where fishing vessels are crossing each other's tracks or passing in proximity, knowing the actual location can help reducing the risk of collision and increase safety. Finally, it can help fishers comply with fishing regulations. Many areas have restrictions on where and when fishing can take place, and these regulations are in place to protect fish populations and the marine environment. By knowing the exact location of their trawl, fishers can ensure that they are fishing in compliance with these regulations.

Simrad PxPos sensors makes it possible to geo locate gear below the surface, using true latitude and longitude coordinates, as well as relative beading from the vessel. The acoustic response from the Simrad PxPos sensors is used to determine relative bearing to the sensors and the slant range (distance between transducer on the vessel and sensor). Together with measurements of depth, the vessels actual heading and vessel GPS position, the actual WGS84 GPS coordinates are calculated for each Simrad PxPos sensor. Installing Simrad PxPos sensor on the trawl gear hence makes it possible to know the exact location of both trawl doors and trawl net.

The aim of this activity was to verify that the system functions as intended and collect data for post-processing.

#### Method

Three Simrad PxBos sensors, two PX MultiSensors, one PX Flow Sensor, one PX TrawlEye and one PX miniCatch sensor were mounted on the IMR Vito pelagic sampling trawl in different configurations throughout the trip. The trawl doors were fitted with door brackets allowing for installation of two Simrad sensors in each door. In order to test different combination of sensors measurements, the Simrad PxBos and Simrad PX Sensors were configured so trawl geometry (distance between headline and trawl doors) was measured between Simrad PxBos and either PX Flow, PX MultiSensor or PX TrawlEye. Trawl door spread (distance between doors) was measured between Simrad PxBos and Simrad PxBos Remote sensor. Simrad sensors were in addition used to measure simultaneous depth of both trawl doors and the headline. Simrad PX miniCatch and Simrad PxBos sensors were also installed on the cod-end section during some of the hauls, while PX Flow in several hauls were installed on the headline and PX TrawlEye either in headline or in one of the trawl doors.

Simrad TP90 Trawl Positioning transceiver was provisionally installed on GO Sars using the already installed trawl positioning transducer. The SR70 Receiver Unit for Simrad PX, was installed using the onboard Scanmar hydrophone. Both The TP90 and SR70 were then connected to TV80 Trawl Software. Between the hauls, TV80 was used to change configuration of both Simrad PX and Simrad PxBos sensors. TV80 was as well configured to receive data from the onboard Gyro, onboard GPS, data from Simrad Echo Sounder and winch information from the Scantrol system.

Table 6. Overview of trawl hauls and Simrad Sensor usage

Haul	Date	Lat (N)	Lon (E)	Time start	Time end	Simrad Sensors used
489	22.11	69°54'	20°26'	21:46	23:47	3 PxBos Sensors and 1 PX miniCatch Sensor
492	23.11	70° 19'	20°55'	14:26	15:13	3 PxBos Sensors, 2 PX MultiSensors and 1 PX miniCatch Sensor
493	23.11	70° 28'	21°12'	18:41	19:42	3 PxBos Sensors and 2 PX MultiSensors
496	24.11	70°18'	20°58'	12:17	15:00	3 PxBos Sensors, 1 PX MultiSensors and 1 PX Flow Sensor
497	24.11	70°19'	20°57'	19:06	19:39	3 PxBos Sensors, 2 PX MultiSensors, 1 PX miniCatch, 1 PX Flow and 1 PX TrawlEye Sensor
498	24.11	70°21'	20°51'	21:47	22:17	3 PxBos Sensors, 2 PX MultiSensors, 1 PX miniCatch, 1 PX Flow and 1 PX TrawlEye Sensor
499	24.11	70°19'	20°52'	23:54	0:39	3 PxBos Sensors, 2 PX MultiSensors, 1 PX miniCatch, 1 PX Flow and 1 PX TrawlEye Sensor
501	25.11	70°20'	20°54'	8:58	9:29	3 PxBos Sensors, 2 PX MultiSensors and 1 PX Flow Sensor
502	25.11	70°18'	20°58'	11:12	13:39	3 PxBos Sensors, 2 PX MultiSensors and 1 PX Flow Sensor
503	25.11	70°39'	20°09'	18:47	19:17	3 PxBos Sensors, 2 PX MultiSensors, 1 PX Flow Sensor and 1 PX miniCatch Sensor
508	26.11	70°34'	19°42'	8:56	9:13	3 PxBos Sensors, 2 PX MultiSensors, 1 PX Flow and 1 PX TrawlEye Sensor

## Preliminary results

TV80 was configured to output standard Simrad ITI compatible NMEA sentences, recognized by most plotters and configured to output on LAN data using the newer PSIMTV80 format. Furthermore, TV80 was configured to create CSV files of all received measurements. Special tools were used to capture all output data formats and store data for more detailed in-depth analysis at a later time.

The initial impression from observations during the trip, is that the system performed as expected with a high degree of stability. Relative bearing and slant range calculations from the received Simrad PXPoS Sensors transmissions were updated with the expected interval and no consistent data loss detected during any of the hauls. Readouts on the TV80 of the measured data were consistent with data received from other systems on the vessel.

More work will now be spent on analyzing the recorded data.

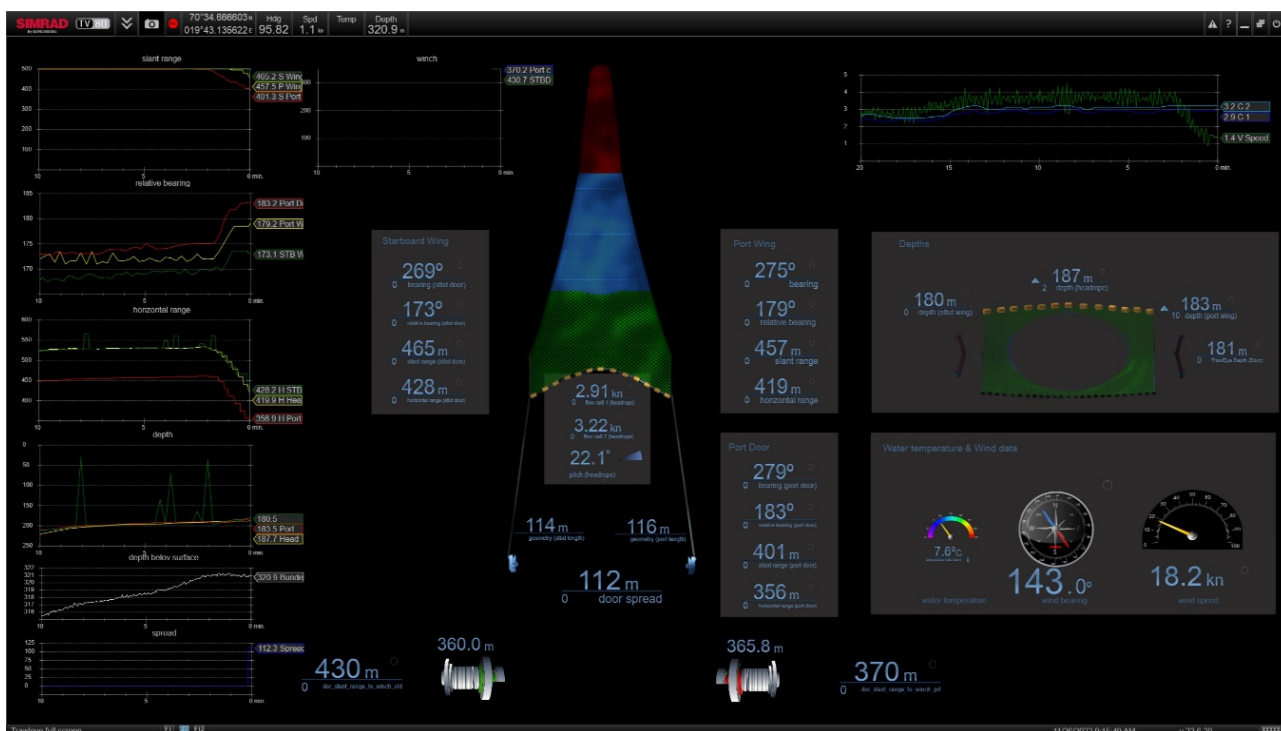


Figure 14. Screen view of the TV80 software.

## 4 - Activities part II

### 4.1 - Ship mounted Simrad EK80 Echosounder settings and calibration

Rokas Kubilius (IMR) and Ahmet Pala (UiB)

G.O. Sars is equipped with six drop-keel mounted echosounders (Simrad EK80) capable of continuous wave (CW)/narrowband or frequency modulated (FM)/broadbanded (except 18 kHz) pulse generation. These have nominal frequencies at 18, 38, 70, 120, 200, and 333 kHz.

Ship echosounders were operated with both CW and FM acoustic pulses. Settings for these were chosen to fit survey objectives and to avoid undesirable effects such as acoustic “cross-talk” in broadband data. This influenced the choice of the acoustic bandwidth, power, and pulse duration settings (Table 7). Standard CW pulse settings (Korneliussen et al., 2008) were used but with reduced power to match power setting of alternating CW / FM pulses that were used for the CW/FM comparisons during this survey. The standard IMR FM pulse settings for broadband acoustic backscatter data collection were used.

Ship EK80 echosounder setting consisted of two ping groups that were pinging in alternating fashion, the CW ping group and FM ping group. FM ping group included 18 kHz producing CW pulses (it is not capable of FM pulse operation). The LoVe ocean observatory transect data were collected using Ping Group 2 setting alone.

Table 7. The ship drop keel-mounted echo sounder (Simrad EK80) setting configurations. “CW” - continuous wave pulses (narrowband). “FM” – frequency modulated pulses (broadband). “FM-Up” – frequency modulated up-sweep pulse.

Chanel	Tr. type	Pulse shape	Bandwidth [kHz]	Taper	Pulse duration [ms]	Power [W]
<b>CW (Continuous Wave) Ping Group 1</b>						
18-CW	ES18	CW	-	Fast	1.024	800
38-CW	ES38-7	CW	-	Fast	1.024	400
70-CW	ES70-7C	CW	-	Fast	1.024	225
120-CW	ES120-7C	CW	-	Fast	1.024	100
200-CW	ES200-7C	CW	-	Fast	1.024	105
333-CW	ES333-7C	CW	-	Fast	1.024	40
<b>FM (Frequency Modulated) Ping Group 2</b>						
18-CW	ES18	CW	-	Fast	1.024	800
38-FM	ES38-7	FM-Up	34-45	Fast	2.048	400
70-FM	ES70-7C	FM-Up	50-85	Fast	2.048	225
120-FM	ES120-7C	FM-Up	95-165	Fast	4.096	100
200-FM	ES200-7C	FM-Up	170-260	Fast	4.096	105
333-FM	ES333-7C	FM-Up	280-380	Fast	4.096	40

Ship drop-keel mounted echosounders (2022.11.27, Tromsø) were calibrated using standard (Demer, 2015) and metallic spheres of various sizes made of tungsten carbide with 6 percent cobalt binder. The calibration sphere diameter was chosen based on the best fit for the bandwidth in question in terms of the “null” positions in the frequency response of the sphere (Table 8 and Figure 15). Both narrowband and broadband pulses were

calibrated; calibration data log in Table 9. Example calibration results are shown in Figure 16. A second calibration target of a different size was used where needed to ensure calibration data across the entire bandwidth of the chosen acoustic pulse and the two calibration results merged as per EK80 software procedures for it. Calibration target diameters used were 57.2 mm, 38.1 mm, 35 mm, 25 mm, 22 mm, and 20 mm, and these are referred to "WC" plus the diameter, e.g. WC38.1 (Table 9).

An additional weight (500g shackle) was used to stabilize spheres of smaller size (WC38.1, WC35, WC22, and WC20) when calibrating ship echosounders. It was suspended 5-7 m below the calibration target by 0.5 mm diameter nylon line. WC57.2 was used alone with no additional weights. All spheres had nylon line netting with 1-2 m long loop to ensure the calibration target is removed in range from the three winch-line suspension rig line and knot echoes that are present just above the calibration target.

Calibration conditions and quality were good to excellent. Calibration results text files (\*.xml) may benefit from check-up and calibration re-run from acoustic raw data files before these are used to scale fish acoustic frequency response data.



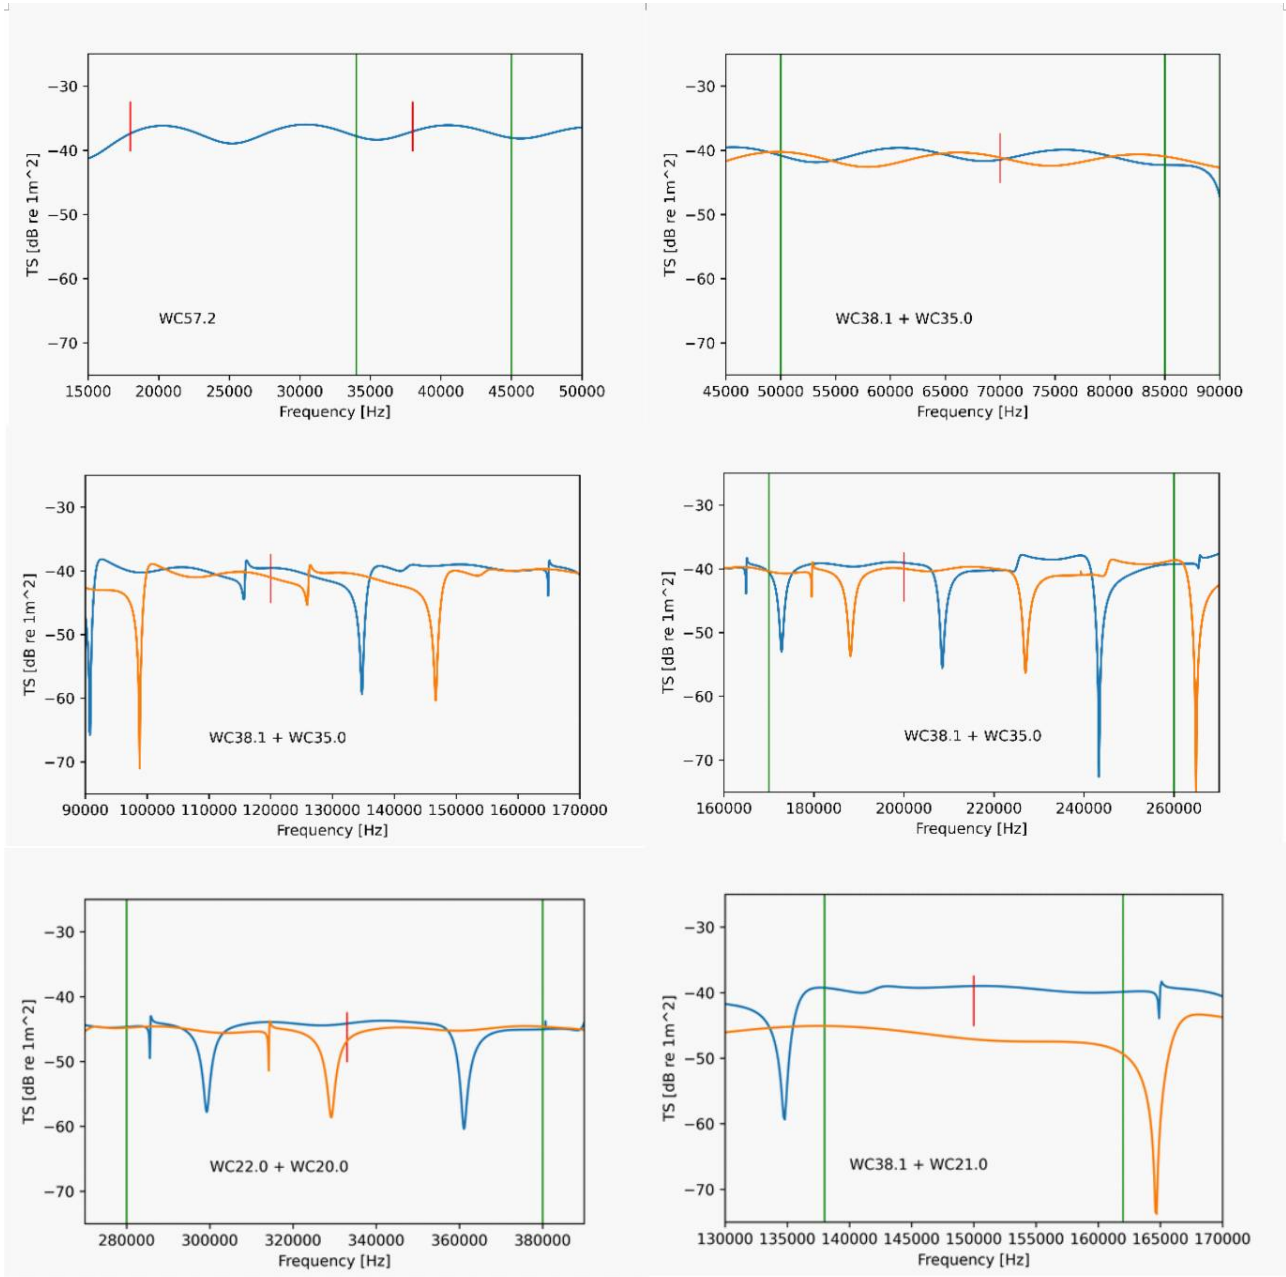


Figure 15. The expected tungsten carbide calibration sphere acoustic target strength versus acoustic frequency. Calibration targets and target acoustic frequency response for the narrow and broadband pulse calibration of nominal frequencies: (a) 18 and 38 kHz, (b) 70 kHz, (c) 120 kHz, (d) 200 kHz, (e) 333 kHz, and (f) 150 kHz of EC150-3C unit. Dual-sphere calibration was necessary for certain pulses of broad bandwidth. This is to bridge the gaps over “nulls” in the acoustic frequency response of one sphere with data from another sized sphere. “WC57.2” refers to sphere diameter (in mm) and material (tungsten carbide). Blue lines are for the larger of the two spheres in one graph. Vertical red lines indicate nominal “CW” frequencies. Vertical green lines indicate limits of broadband pulse bandwidth.

Table 8. Calibration target choice for narrowband (CW) and broadband (FM) pulses of indicated nominal frequency echosounder (e.g., “70CW” - continuous wave pulses at 70 kHz nominal frequency). Yellow marked calibration are not used to update EK80 (additional experimentation data for CRIMAC WP2).

		18CW	38CW	38FM	70CW	70FM	120CW	120FM	200CW	200FM	333CW	333FM
Sphere ID	BW (kHz)	-	-	34-45	-	50-85	-	90-170	-	170-260	-	280-380

IMR106	WC57.2	X	X	X	X		X		X			
IMR023	WC38.1		X	X	X	X	X	X	X	X		X
IMR123	WC35							X		X		X
IMR139	WC25							X		X	X	X
IMR065	WC22									X		X
IMR008	WC20											X

Table 9. Ship EK80 and EC150-3C calibration data collection log (2022.11.27) at calibration site near Tromsø. Data collection sequence is based on calibration target deployment.

Chanel	Frequency [kHz]	Pulse shape	Pulse duration [ms]	Power [W]	Power taper	Beam mapping	Calibration target	EK80 Updated
18-CW	18	CW	1.024	800	Fast	Full	WC57.2	Yes, replace
38-CW	38	CW	1.024	400	Fast	Full	WC57.2	Yes, replace
<b>38-FM</b>	<b>34-45</b>	FM-Up	<b>2.048</b>	400	Fast	Full	WC57.2	Yes, replace
70-CW	70	CW	1.024	225	Fast	Full	WC57.2	No
120-CW	120	CW	1.024	100	Fast	Full	WC57.2	No
200-CW	200	CW	1.024	105	Fast	Full	WC57.2	No
70-CW	70	CW	1.024	225	Fast	Full	WC38.1	Yes, replace
<b>70-FM</b>	<b>50-85</b>	FM-Up	<b>2.048</b>	225	Fast	Full	WC38.1	Yes, replace
120-CW	120	CW	1.024	100	Fast	Full	WC38.1	Yes, replace
<b>120-FM</b>	<b>95-165</b>	FM-Up	<b>4.096</b>	100	Fast	Full	WC38.1	Yes, replace
200-CW	200	CW	1.024	105	Fast	Full	WC38.1	Yes, replace
<b>200-FM</b>	<b>170-260</b>	FM-Up	<b>4.096</b>	105	Fast	Full	WC38.1	Yes, replace
<b>333-FM</b>	<b>280-380</b>	FM-Up	<b>4.096</b>	40	Fast	Full	WC38.1	No
<b>38-FM</b>	<b>34-45</b>	FM-Up	<b>2.048</b>	400	Fast	Full	WC38.1	No
<b>EC-150-3C</b>	150	CW	1.024	90	Fast	Full	WC38.1	Yes, replace
<b>EC-150-3C</b>	<b>138-162</b>	FM-Up	<b>2.048</b>	90	Fast	Full	WC38.1	Yes, replace
38-CW	38	CW	1.024	400	Fast	Full	WC38.1	No
<b>120-FM</b>	<b>95-165</b>	FM-Up	<b>4.096</b>	100	Fast	Full	WC35	Yes, MERGE
<b>200-FM</b>	<b>170-260</b>	FM-Up	<b>4.096</b>	105	Fast	Full	WC35	Yes, MERGE
<b>333-FM</b>	<b>280-380</b>	FM-Up	<b>4.096</b>	40	Fast	Full	WC35	No
<b>200-FM</b>	<b>170-260</b>	FM-Up	<b>4.096</b>	105	Fast	Full	WC25	Yes, MERGE
<b>120-FM</b>	<b>95-165</b>	FM-Up	<b>4.096</b>	100	Fast	Full	WC25	No
<b>333-FM</b>	<b>280-380</b>	FM-Up	<b>4.096</b>	40	Fast	Full	WC25	No

333-CW	333	CW	1.024	40	Fast	Full	WC25	No
333-CW	333	CW	1.024	40	Fast	Full	WC22	Yes, replace
333-FM	280-380	FM-Up	4.096	40	Fast	Full	WC22	Yes, replace
333-FM	280-380	FM-Up	4.096	40	Fast	Full	WC20	Yes, MERGE
	<b>All CW in PASSIVE</b>	CW					PASSIVE record. 200pings. 700m record range. Ping rate 1/sec.	
	<b>All FM in PASSIVE</b>	FM-Up					PASSIVE record. 200pings. 700m record range. Ping rate 1/sec.	

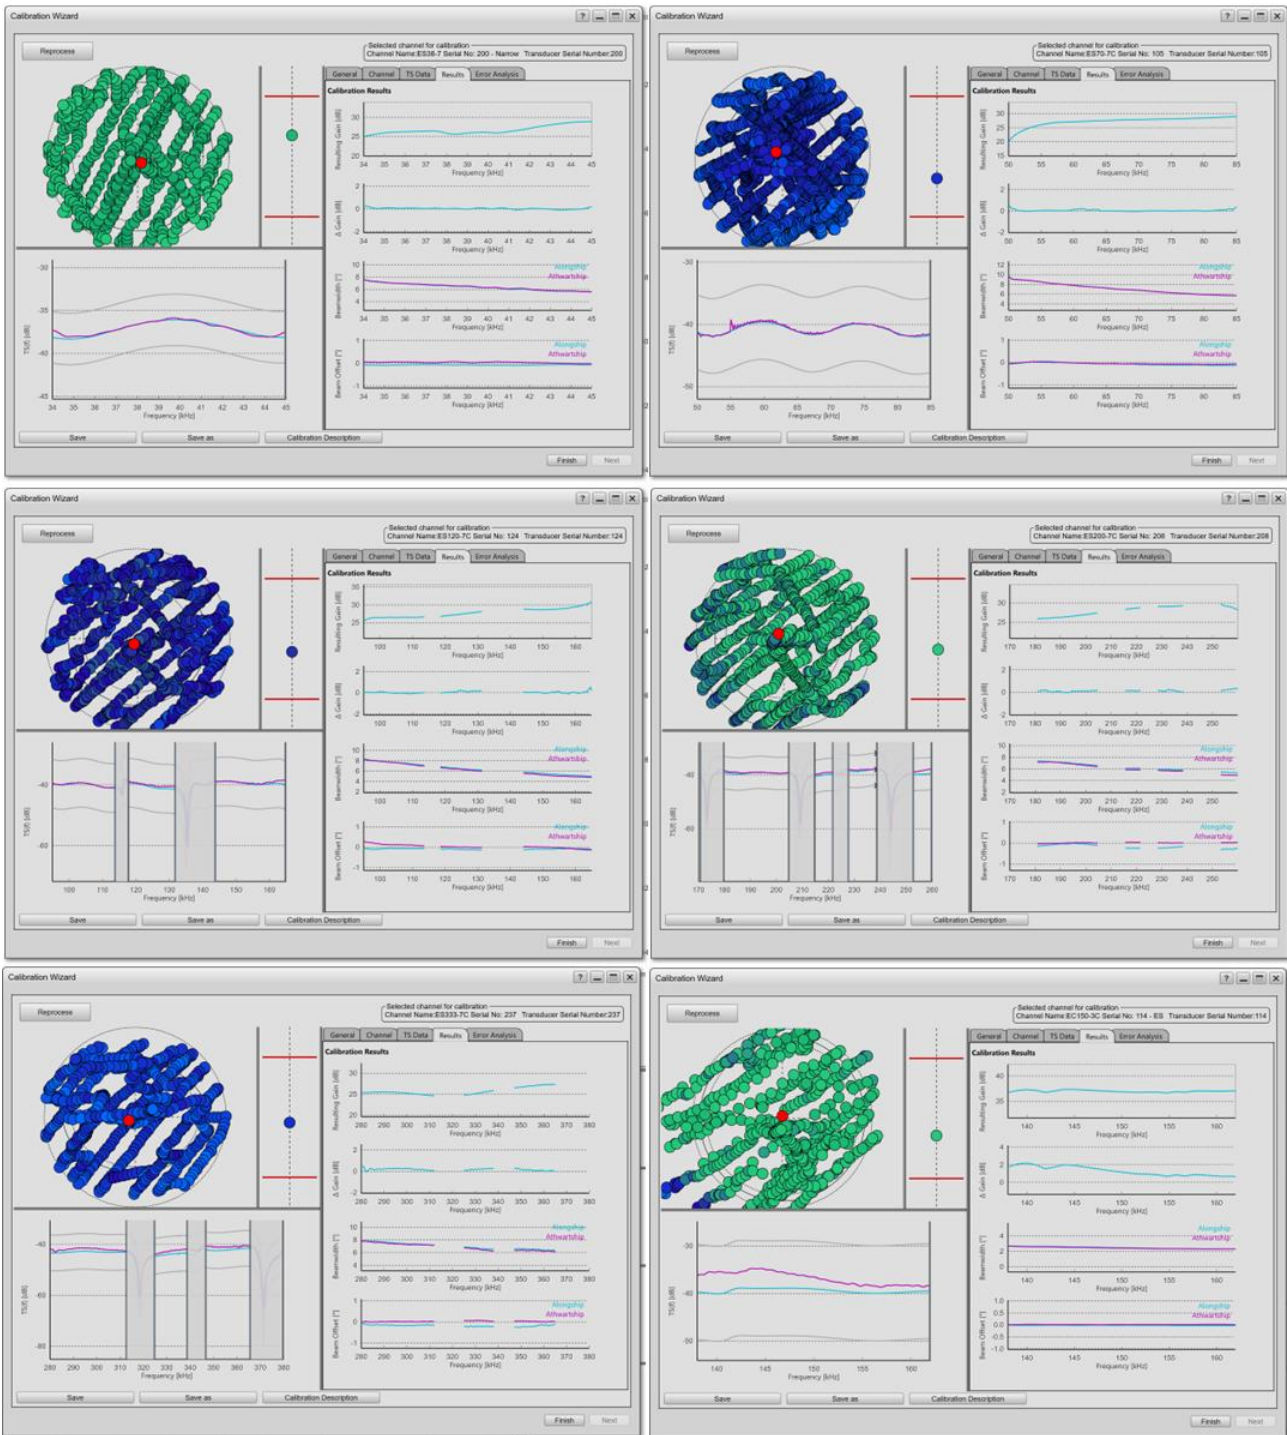


Figure 16. Representative ship EK80 echosounder calibration examples with full beam mapping exercise (left) and calibration results (right) displayed. Four calibrations are shown: (a) 34-45 kHz, (b) 50-85 kHz, (c) 95-165 kHz, (d) 170-260 kHz, (e) 280-380 kHz pulses. (f) show EC150-3C ADCP / echosounder system calibration. Operated as echosounder with 138-162 kHz broadband pulses. WC57.2 is used for (a), WC38.1 is used for (b), (c), (d), (f), and WC25 for (e).

## 4.2 - Simrad EC150-3C ADCP calibration

The Simrad EC150-3C ADCP / echosounder is installed on the ship drop-keel and is capable of CW and FM pulse generation both when operated as an ADCP and as a scientific fisheries echosounder of rather narrow beamwidth (2.5°) with both narrow- and broad-band acoustic pulses. It was calibrated with WC38.1. The ADCP

beam was calibrated along with the other ship based echosounders, c.f. Table 8.

The Simrad EC150-3C ADCP calibration was performed in Kvænangen fjord, north of Tromsø (2022.11.29, 06:58-07:33) and in fjord outside Myre, Lofoten (2022.12.02, 11:04-11:34 UTC). A standard procedure was followed (provided by the producer). Ship sailed 2 circles clockwise and 2 circles anticlockwise at >6 knots speed (Figure 17). Circle diameter 200-400 m. Bottom depth approximately 200 m (Kvænangen) and 100m (Myre). Note that there was much herring in the water column in Kvænangen (Figure 18). Ample herring in the water column had no negative effect on ADCP calibration.

EC150-3C ADCP and RDI ADCP inter-calibration was performed close to Vestrålen (2022.12.02, 07:30-09:49 UTC). The two ADCP's ran synchronised with each other. Vessel sailed at 10 knots for 1h west out of the fjords into the open sea, turned about and returned on the same path.

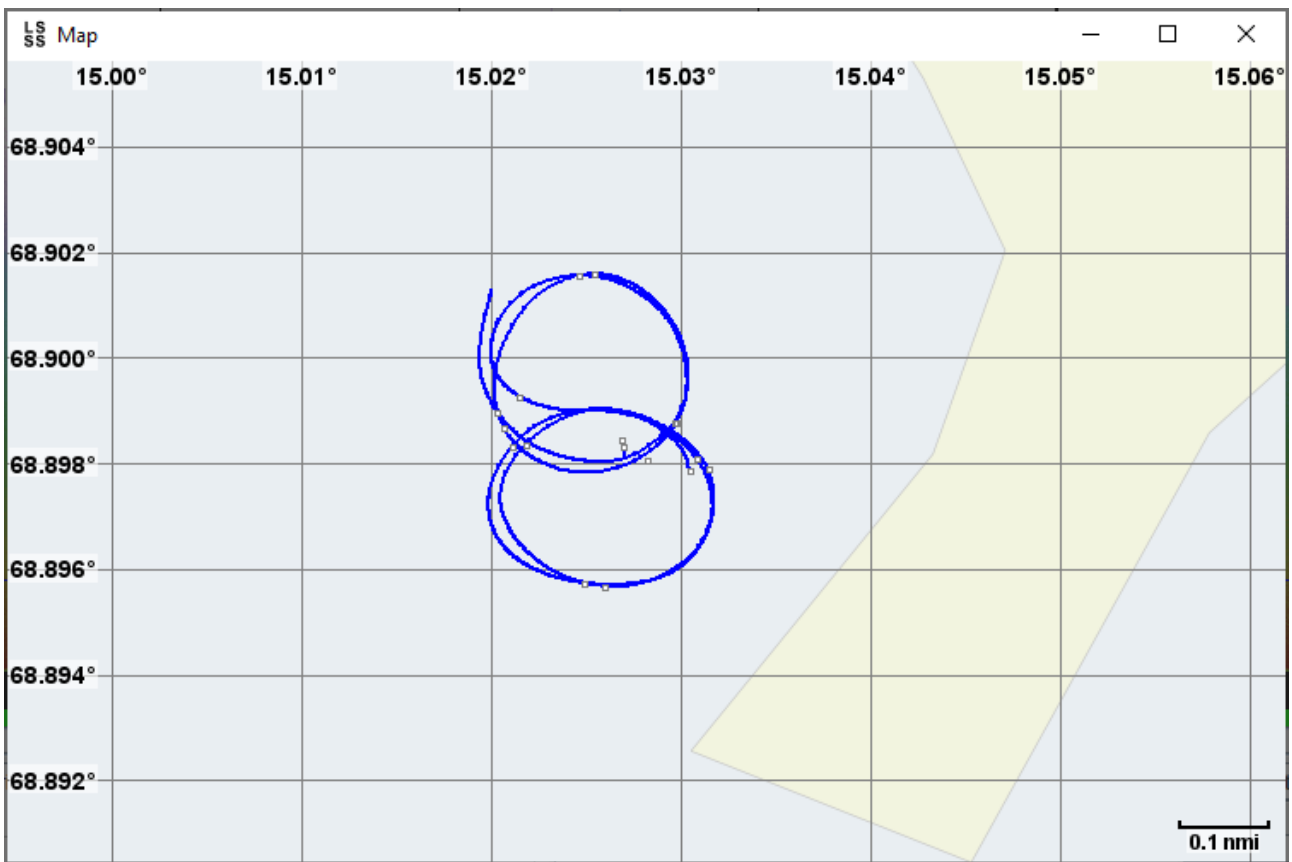


Figure 17. The EC150-3C ADCP calibration against the bottom echo detection. Ship is driven in circles at >6 knots speed with 200-400 m circle diameter.

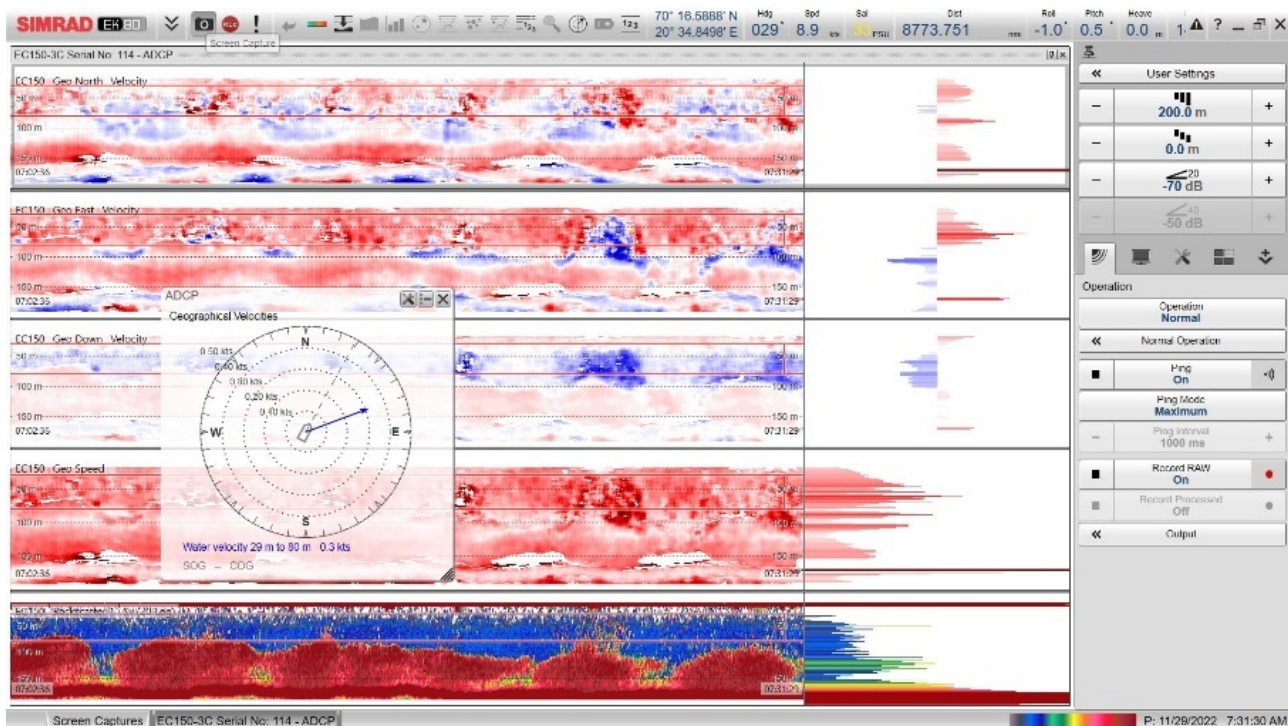
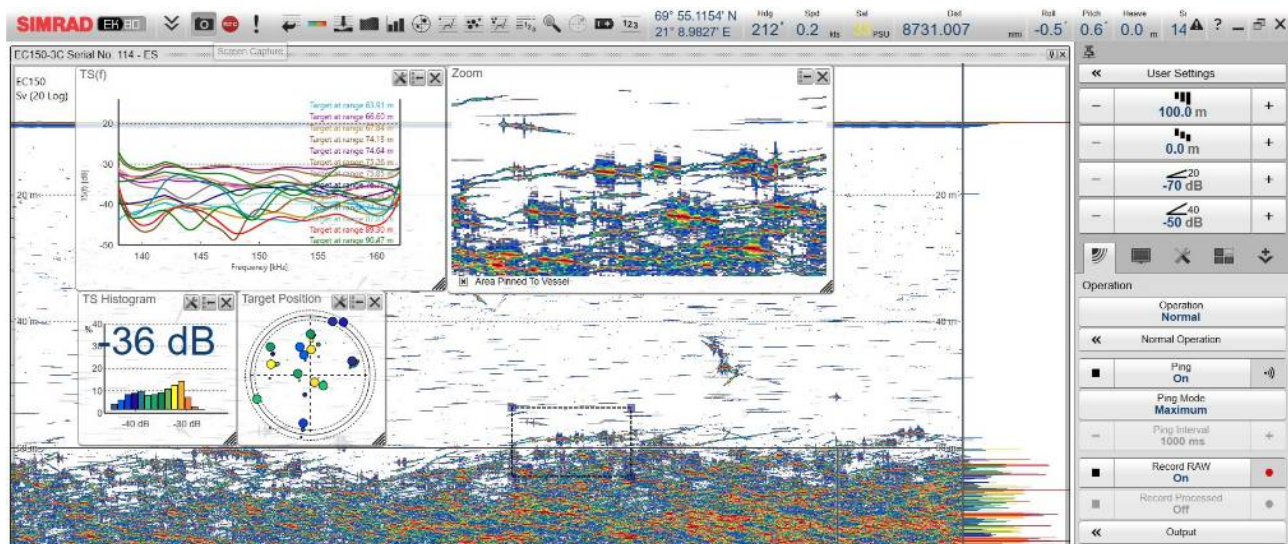


Figure 18. EC150-3C ADCP calibration in Kvænangen (2022.11.29) with ample herring in the water column.

### 4.3 - EC150-3C operation as echosounder

Dataset was collected with EC150-3C unit operating as an echosounder of rather narrow, 2.5° beamwidth. Three settings were used: linear up-sweep, 138-162 kHz pulses of 2 ms duration with “fast” and “slow” taper, and 150 kHz narrowband pulses of 1 ms duration. The ability to resolve individual herring at the outskirts of a dense fish layer residing at 60-80 m depth was demonstrated (Figure 19). The Ship keel-mounted echosounders (7° beamwidth) were unable to resolve herring as individuals at this range. A 30 min long datasets were collected on 2022.11.28 21:35 UTC and 2022.11.29 19:50 UTC in Kvænangen fjord and in the open sea 12 nmi westwards of Kvænangen fjord, respectively.



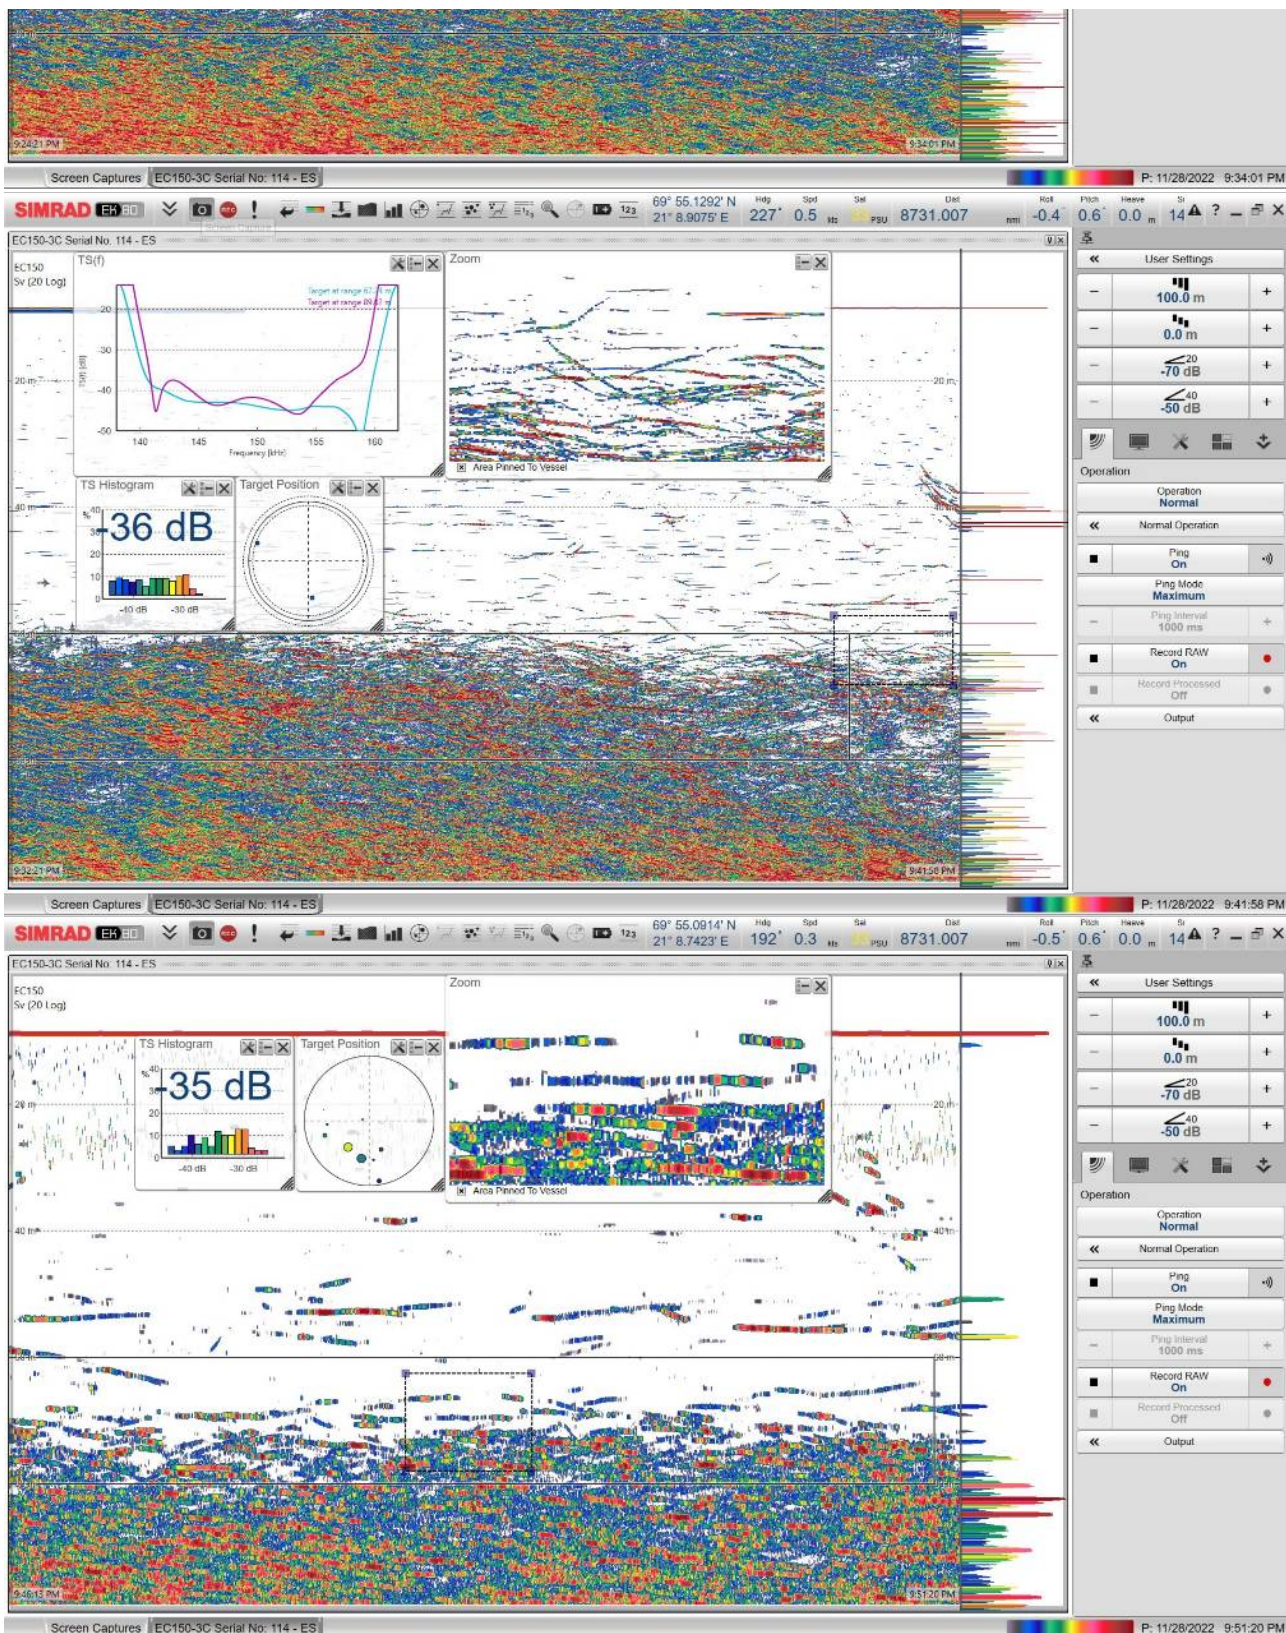


Figure 19. Example EC150-3C echosounder echograms. Herring is resolved as individual target at the top outskirts of the layer observed at 60-150 m depth in Kvænangen fjord. Demonstration of advantage of rather narrow, (2.5°) beamwidth to resolve individual targets at range. The broad band pulses of "fast" (upper panel) and "slow" (middle panel) taper were used. The narrowband pulses of 1 ms duration were also tested (lower panel).

## 4.4 - Node 7 EK80 echosounder calibration

### Objective

The objective of this task was to do broadband calibration of the seafloor mounted EK80 (LoVe Node 7) according to Ona et al. (2020).

### Method and results

The bottom mounted Node 7 Simrad EK80 echosounder (single ES70-7CD transducer) was calibrated according to Ona et al. 2020 (Figure 20). Prior to the calibration a CTD cast was performed. Two calibration spheres (WC57.2 and WC35) were suspended 14 m and 7 m, respectively, below the CTD frame. A  $\varnothing 0.6$  mm nylon line was used to attach the spheres to the frame. The Node 7 echosounder beam has a diameter of about 25 m at the sea surface (220 m range to surface). Remote access (Screen Connect) to the LoVe server was used to visually follow the positioning and data collection from the seafloor echosounder. To aid in position the sphere the backscattering from the CTD frame was used. After positioning the CTD and spheres within the beam close to the surface, the CTD frame was lowered to 40 m depth. The DP system of GO Sars was used to position and move the spheres within the acoustic beam of the node echosounder. Once the LoVe Node beam had been located, the vessel locked to the exact position using its DP system and, thereafter, moved slowly and precisely to achieve the beam coverage required for calibration. The vessel's 70-kHz echosounder was in passive mode during the calibration to observe the background noise and avoid interference with the observatory echosounder transmitting every 1 s. A standard full beam mapping calibration was achieved.

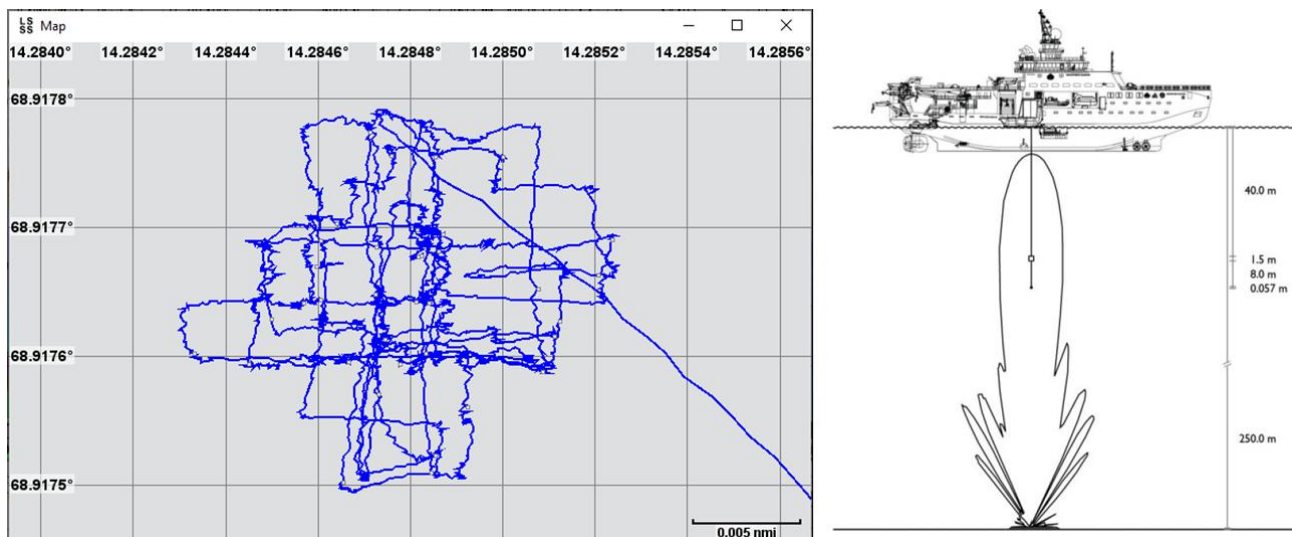


Figure 20. The ship path (left) as it was moved with help of the thrusters alone. The CTD roset and echosounder calibration sphere were suspended under and moved together with the ship. Full beam mapping calibration of the bottom mounted echosounder was achieved. Right: the figure 2 from Ona et al. (2020) publication describing the calibration methodology.

## 4.5 - Noise observations

Rolf Korneliussen (IMR)



## Objective

The objective of this activity was to verify methods developed to estimate noise in broadband measurements (FM). Both narrowband frequency-dependent noise (1) as well as ambient noise visible in pulse-compressed data (2) is investigated. Furthermore, it is necessary to investigate if estimation of noise can be achieved while active pinging (3). The removal of frequency-dependent noise is needed if there is a strong band-limited component that would reduce the quality of a sub-band.

## Method

Data were collected from EK80 during the following times to investigate tasks (1), (2) and (3): 2022.11.28 00:00:28 UTC – 2022.11.28 05:07:42 UTC (Passive FM data, 18 kHz CW active), 2022.11.29 23:04:33 UTC – 2022.11.30 14:27:13 UTC (Active FM data, 18 kHz CW active).

The measurement of narrowband frequency-dependent noise in FM (Task 1) were investigated by continuously measuring the local noise and comparing that to the local noise-floor. If the local noise was above a specified relative strength (here: 4 dB above the local noise-floor), it was registered as a noise-frequency. Furthermore, the width of the noise-peak was measured, defined as the width between the 50% level on both sides relative to the peak value. Then a gaussian distribution were used to estimate the width 90% down from the peak to get a measure of the width of the frequency-dependent noise-peak. The noise distribution may not strictly follow a gaussian distribution as long as the noise has a gaussian distribution close to 90% upper part of the distribution.

The noise spikes are typically seen as vertical lines in the frequency domain (Figure 21). Removal of band-limited frequency-dependent noise use both frequency and bandwidth as input to a notch filter. The notch-filter is essentially a frequency-dependent multiplier that dampen the signal at the noise-frequency and reduce the values at the neighboring frequencies according to an exponential function using a specified bandwidth.

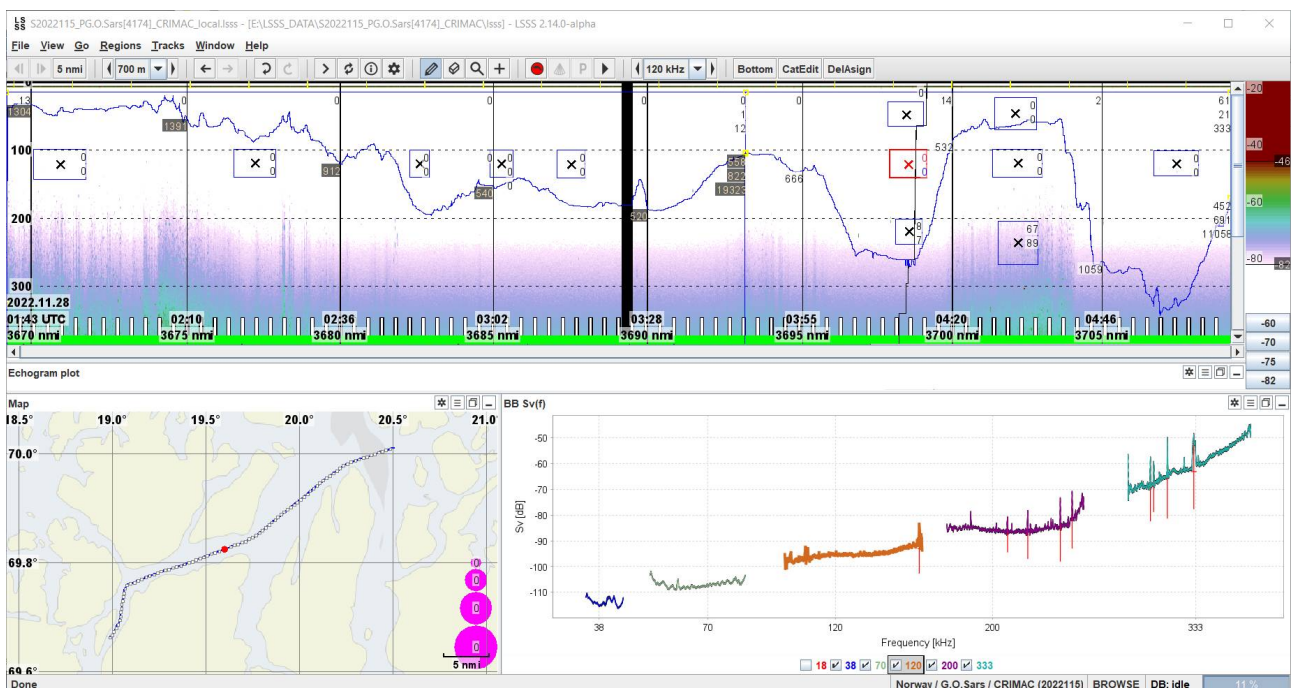


Figure 21. Frequency-limited noise in broadband signals. The lower left panel shows the noise-frequencies as vertical red lines.

The ambient noise was also measured in passive pulse-compressed data (Task 2). All frequencies were run in FM mode using similar settings as during the calibration, except that they were all run in passive mode and that the 18 kHz CW channel were set to the minimum allowed power, i.e., 160 W instead of 800 W. The 18 kHz were operated in active model to measure bottom depth during recordings, and the low power were used to avoid interference with the other frequencies. The passive recordings were collected during bottom-depths varying from 30 m – 330 m. Figure 22 shows the bottom and the estimated noise at 38 kHz. Note that the noise is highly correlated with the bottom depth.

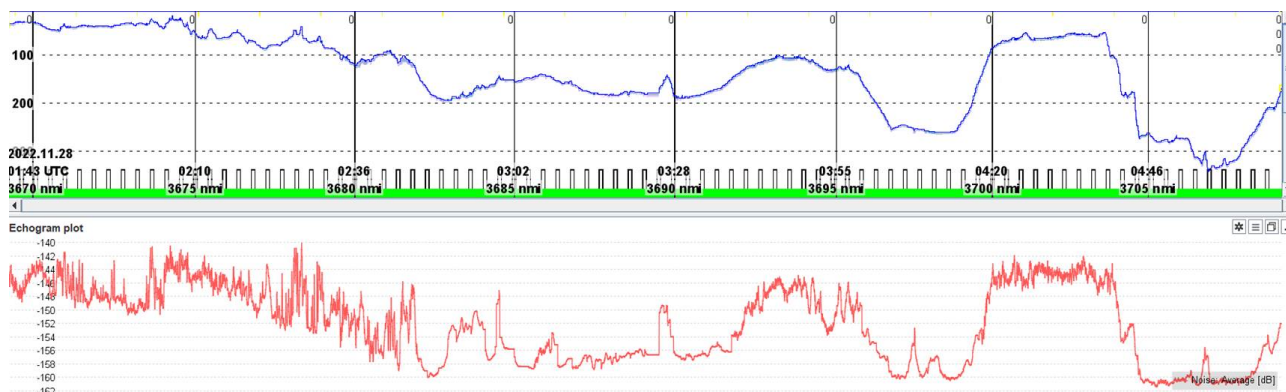


Figure 22. Bottom depth (upper panel) and noise (lower panel) measured at 38 kHz. Noise is estimated for all distances.

If we calculate a single value across the data set for 70 kHz (Figure 23) we obtain essentially the same results as for the 38kHz case(Figure 22), except that there is one value for noise as opposed to an estimate for all distances. The single noise-value is the 5% lowest value of noise at 70 kHz, and for most distances less noise is removed compared to the case where noise is estimated across all distances. Note that the Sv threshold of -150dB is far below the standard -82dB used in IMR surveys, and only very weak signal is affected by the noise removal. Note also that there are some vertical regions of weak signal that follows both the bottom depths and the bottom contour.

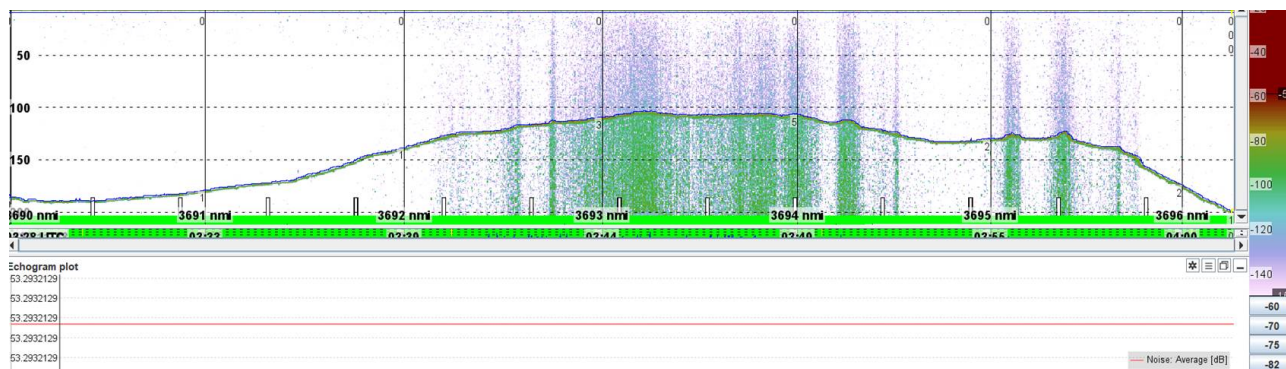


Figure 23. Average noise estimate from the 70kHz transduce, demonstrating very low noise, approximately 5% fallback noise removed at 70 kHz. The Sv threshold is as low as -150 dB.

#### 4.6 - FM to CW comparisons

Rolf Korneliussen (IMR)

## **Objective**

To change data collection in acoustic trawl surveys from multiple frequencies (CW) to broadband, we need to verify that the methods to split broadband measurements into sub-bands to emulate CW signal produce comparable results. The broadband sub-bands are pulse-compressed and sometimes erroneously referred to as CW bands. It is essential that these provide the same results to maintain the time series for acoustic trawl surveys.

## **Method**

To test if the method works it is essential with reliable calibrations. This was our first survey where the echosounders were calibrated at both the CW and FM settings to be used during the survey, except a small deviation in power setting to allow sequential pinging.

The EK80 mission-planner allowing advanced sequencing of different pulse types were used to alternate between CW and FM pinging. The power was deviating from the standard IMR settings allowing sequential pinging between the CW and FM settings, but different power were used at different channels following the power setting for the FM according to the IMR procedure. This was necessary according to the manufacturer (Simrad / Kongsberg) as the electronics (condensator) would not be able to recharge and empty when changing from a CW-ping to a FM-ping at a different power.

The data were first collected at maximum ping rate alternating between 2 pings in CW mode followed by 2 pings in FM mode. With these settings, the echosounder was unable to maintain maximum ping-rate and we experienced several lost pings. The ping-rate was reduced to one ping per 1500 ms, alternating between 1-ping-CW and 1-ping-FM. The sequence was easily identifiable in the data, but could suffer from the charge/recharge problem. To further investigate this, a more careful analysis will be needed.

The test procedure is based on CW-data collected at a bandwidth close to 3 kHz in 1 ms pulses. The FM-data were collected by means of linear up-sweep FM. The bandwidth varied from 11 kHz (38 kHz channel) to 100 kHz (333 kHz channel) at either 2 ms (38 and 70 kHz) or 4 ms (120 – 333 kHz) channels. To compare the results, the summed CW for a school was compared with the FM bands for the same school with decreasing bandwidth (Figure 24).

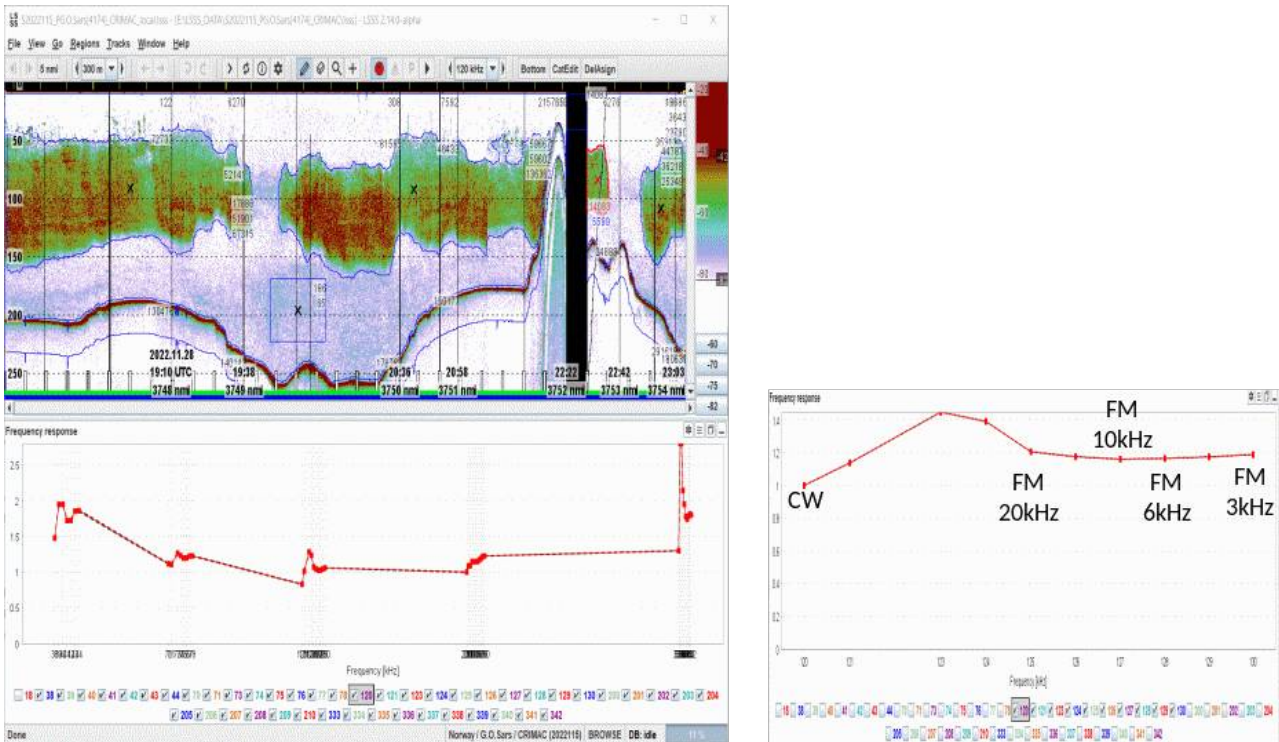


Figure 24. CW of a school compared to FM for the same school. The first point for each transducer (see expanded right plot) is the CW estimate, followed by the full bandwidth, the largest available symmetric bandwidth, respectively, and the last point is 3 kHz, second to last 4 kHz, third last 6 kHz, etc. The values of CW and 3 kHz FM are different and will need further analysis.

## 4.7 - Remote acoustic sizing of herring

Babak Khodabandeloo and Rokas Kubilius (IMR)


### Objective

The objective of this task was to size fish remotely by sideways-looking broadband acoustics. Two laterally sideways looking acoustic beams were used to inspect individual fish in situ at 25-150m range from the ship. These were a metal pole-mounted Simrad EK80 ES200-7C transducer and a modified MS70 processing setup where the array was used to generate a narrow split-beam instead of the full 3D ensonification.

### Method

#### *ES200-7CD pole-mounted, sideways-looking transducer*

A single Simrad EK80 transducer (ES200-7CD, ID. 120) was mounted on a 7 m long metal pole installed on the starboard side of the mid-ship (Figure 25). The transducer was 2 m under the sea surface, tilted ~30° downwards. A 30 m long transducer cable allowed a dedicated Simrad EK80 transceiver to be placed in the ship hangar. The EK80 software were operated from a laptop in the ship instrument room via Ethernet communication. Echosounder was operated at 0.3 s<sup>-1</sup> ping rate, producing 2 ms duration, up-sweep frequency modulated pulses of 160-260 kHz with “fast” or “slow” taper. Echosounder will be calibrated at the pier after the survey. The pole-mounted ES200-7CD transducer has a 7° nominal beam opening angle.

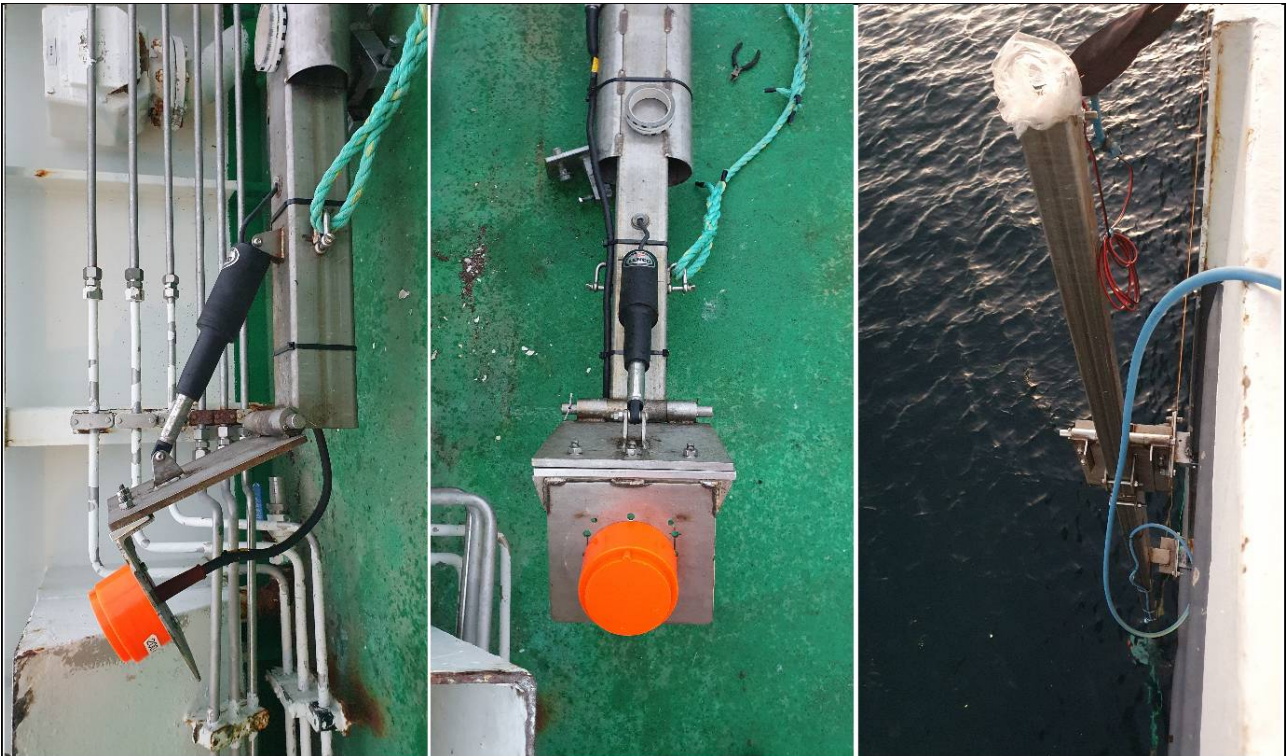

*Figure 25. An ES200-7CD transducer on a 7 m long metal pole (left and middle), installed on the starboard side of the ship (right) with transducer submerged to 2 m depth. Transducer can be tilted to about 30° as shown in the left-most picture.*

Pulse compression of broadband signal provides enhanced range resolution. The range resolution will be  $\sim c/2B$  where  $c$  is the water sound speed and  $B$  is the bandwidth of the transmitted broadband signal. The transmitted pulses were 2 ms up-sweep linear frequency modulated 160-260 kHz, and the corresponding theoretical range resolution is  $\sim 7.5$  mm. Data were collected by four different measurement configurations. Two different filter types, “standard resolution” and “short”, and two different tapers, “fast” and “slow”, were used. Four different setting configurations were used one at a time. Using filter type “Short”, the output file from EK80 has a slightly ( $\sim 40\%$ ) higher sampling rate (or less decimation). Examples of echogram are shown in Figure 26.

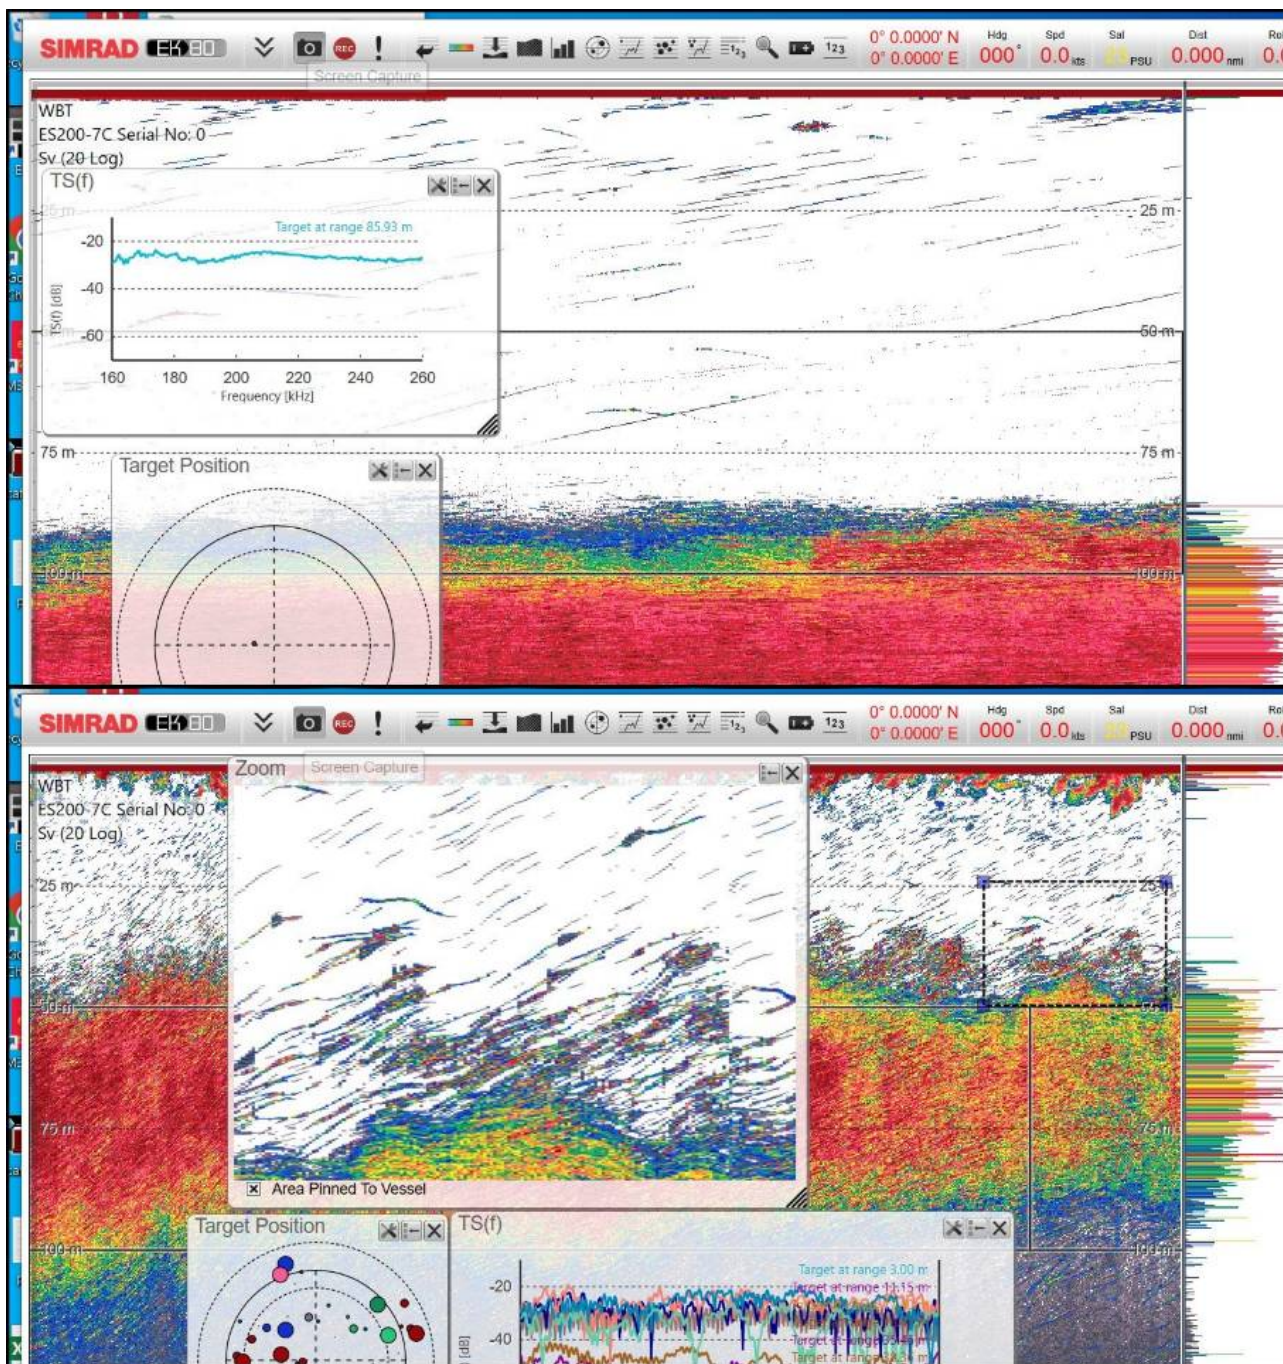


Figure 26. Example echograms of pole-mounted ES200-7C transducer projecting sideways at  $\sim 30^\circ$  tilt towards herring layer/school (echogram extent 150 m range sideways). Upper panel: fish at 80 m range are not resolved as single targets. Bottom panel: fish is resolved as single targets on the outskirts of the schools at 25-50 m range.

*MS70 setup with single, narrow beam*

The MS70 scientific multibeam echosounder is installed on the ship drop-keel with transducer projecting sideways to the port side of the ship. A custom built MS70 software was used to generate a single narrow acoustic beam ( $5.9^\circ$  tall,  $3.4^\circ$  wide) that could be steered vertically to  $0, 5, 10, 15,$  or  $20^\circ$  tilt downwards. The  $20^\circ$

tilt was used on this survey. MS70 was operated with linear up-sweep, 70-120 kHz pulses of “slow” taper (as the only available setting option at the time). A comparatively narrower MS70 beam allowed for individual fish to be resolved at longer range as compared to ES200-7C system. Two snapshot echograms are shown in Figure 27.

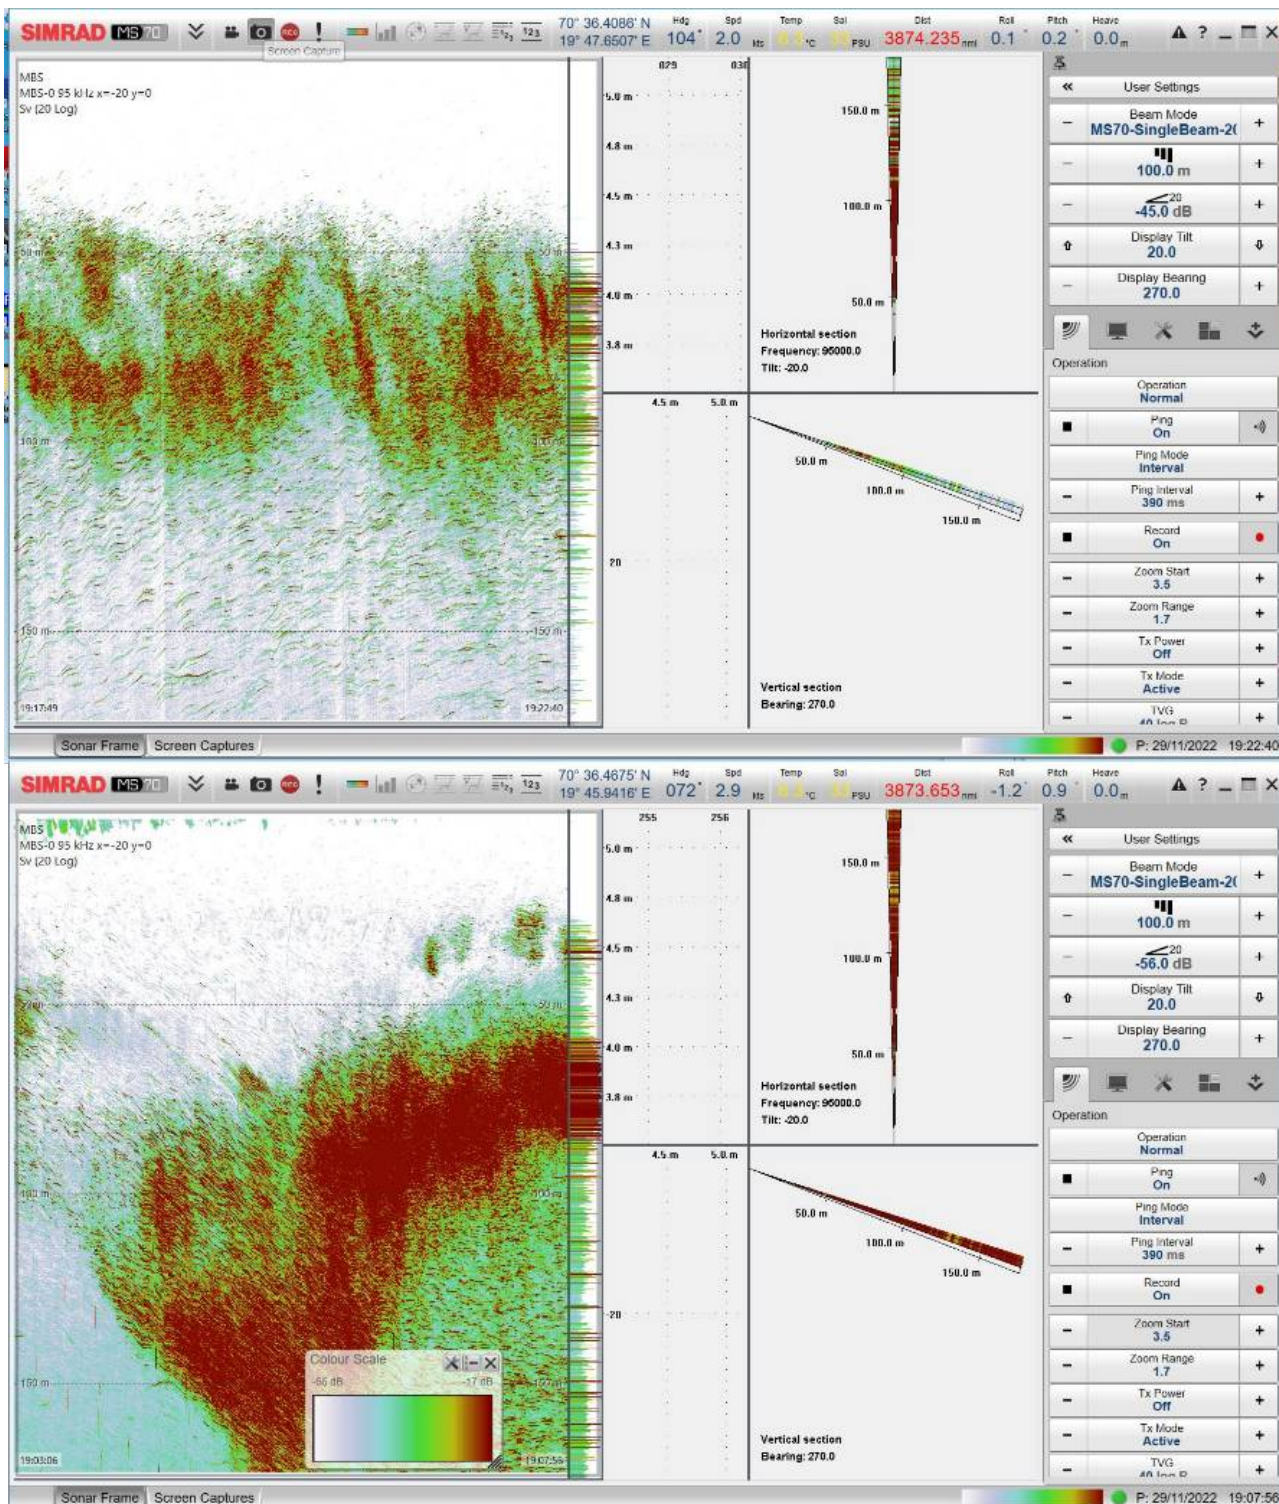


Figure 27. MS70 single, narrow beam pointing to the port side at 20° tilt down. Herring layer/school is being investigated at 50-100 m range. Individual fish can be resolved at the outskirts of the school.

### *Biological sampling*

Biological samples were collected by trawling and fish length, weight, width, and height were measured for subsample of 100-200 fish. The measurement board was used to measure the length and weight, and these data are available through the NMBbiotic database. A digital calliper was used to measure the width and height, and the ID column can be used to combine the data with the length measurements. The height and width measurements are available in an excel sheet located at  
S2022115\_PGOSARS\_4174\BIOLOGY\CATCH\_MEASUREMENTS\

The first data were collected from 28.11.2022 12:00 UTC to 29.11.2022 01:00 UTC (Kvænangen fjord). A second data set were collected in the open sea (about 12 nmi west of Kvænangen), from 29.11.2022 17:15 UTC to 20:20 UTC.

### **Preliminary results**

The pole-mounted ES200-7CD transducer/echosounder was able to resolve individual fish at 25-50 m range but not at 80 m range to fish (Figure 26). The MS70 single beam setup had a narrower beamwidth and was able to resolve fish at greater distance as compared to ES200-7CD (Figure 27). The slow taper pulses had less “temporal sidelobes” before and after individual fish echo detection as compared to fast taper pulse echo data (Figure 28).



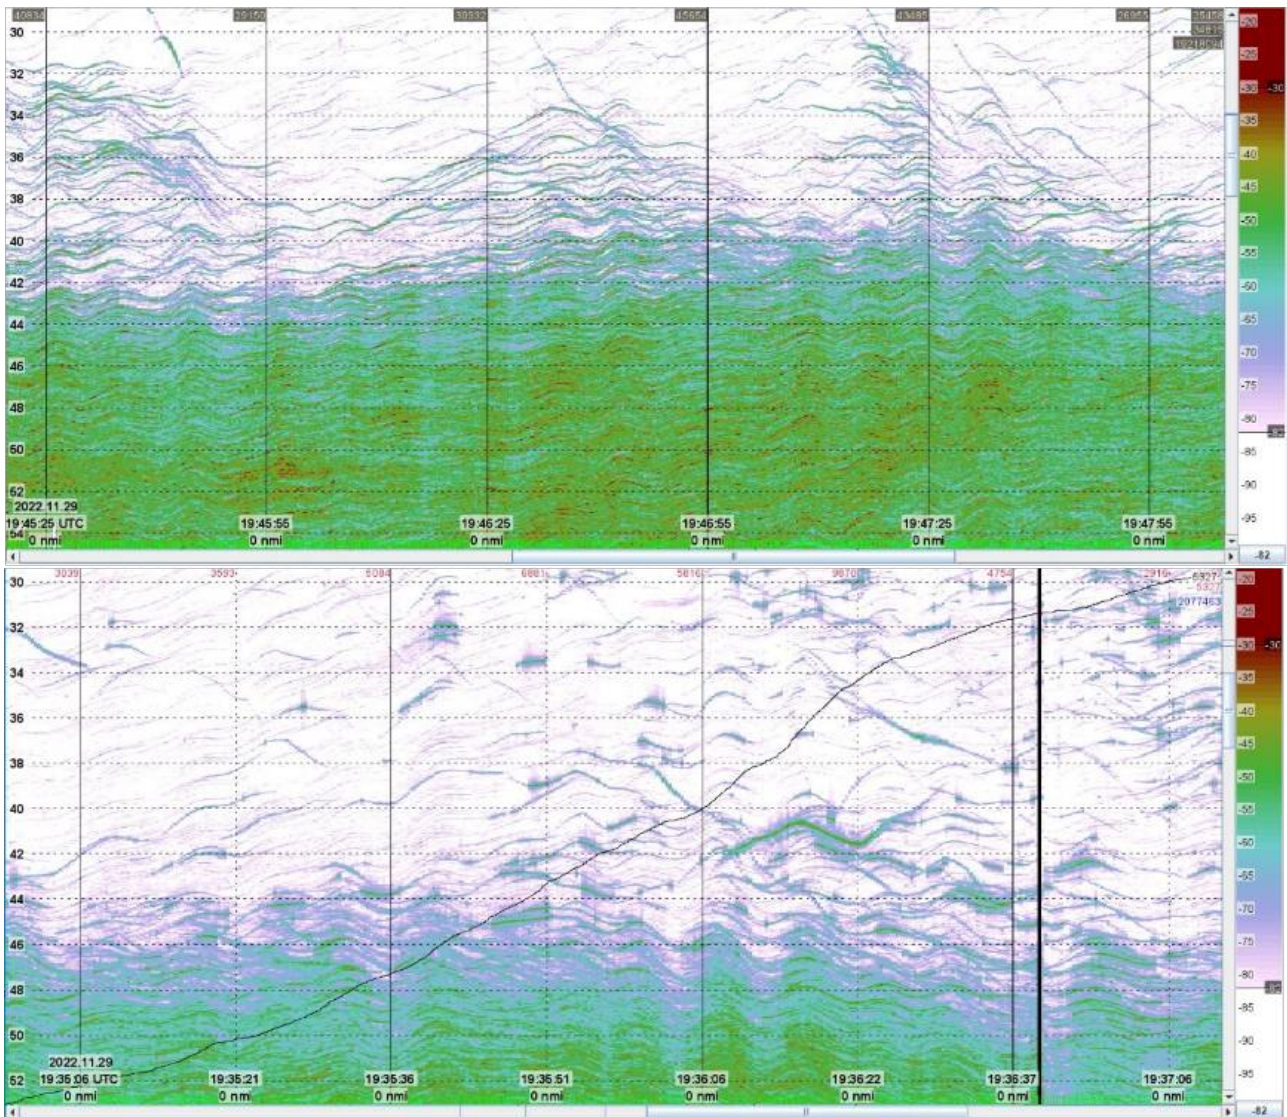


Figure 28. The ES200-7CD pole mounted echosounder data examples with “slow” (upper panel) and “fast” (lower panel) taper setting. Note the more prevalent “temporal sidelobes” before and after the individual fish detection in “fast” tapered pulse echo data.

The initial processing of time-domain signals from ES200-7CD demonstrated multi-peak echo structure that appears to correspond well with the fish body width measurements from the trawl samples (approx. 3 cm, Figure 29). An attempt was also made to size fish body height using the vertically down oriented, ship drop-keel mounted ES200-7C transducer data (Figure 30). The height of the selected fish is approximated to be ~4-5 cm which agrees with the fish height measurements from the associated trawl catch.

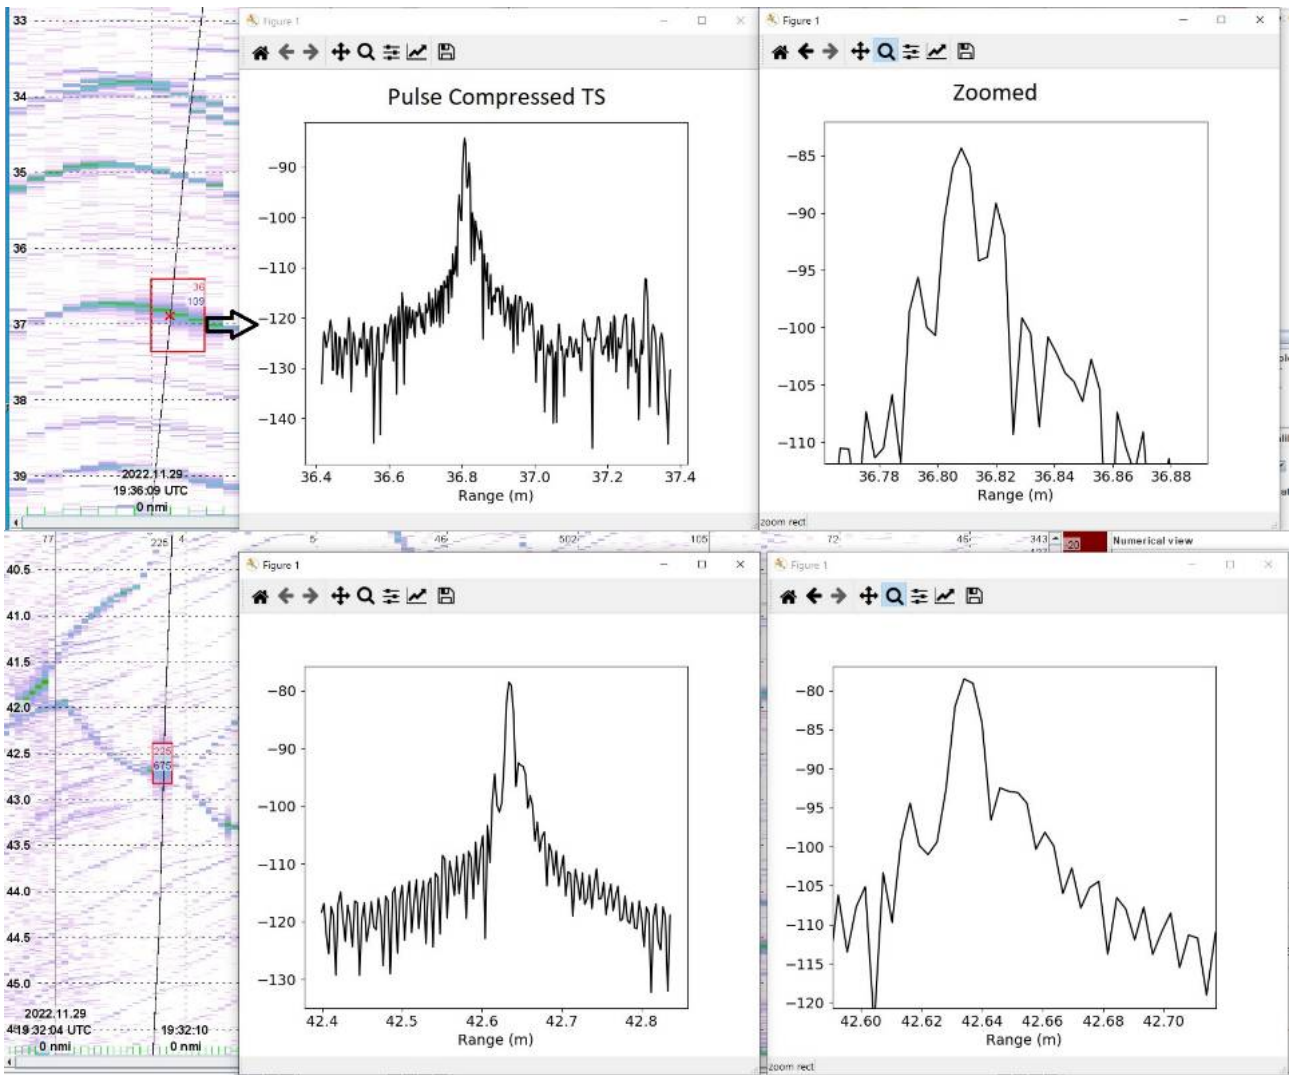


Figure 29. Individual fish echo signal in time-domain is displayed (a single ping data). The main peak and associated lesser peaks are a single fish.

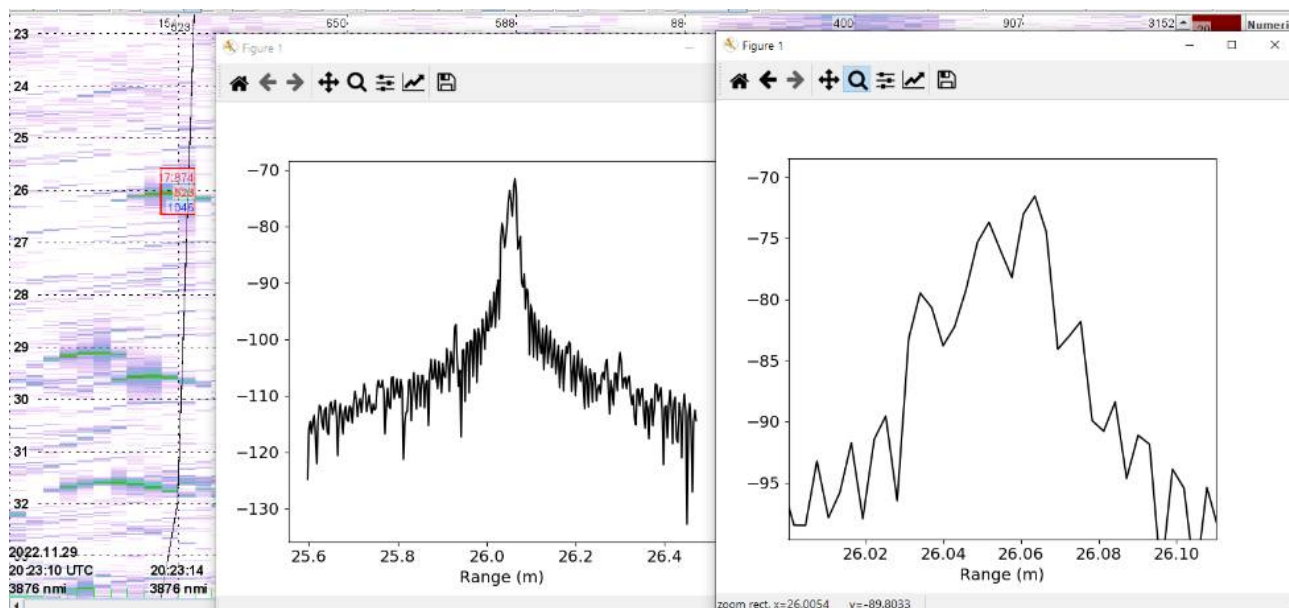


Figure 30. The ship drop-keel mounted, downwards looking ES200-7C echosounder data example. Fish height is attempted to be measured in the same way as the fish width with lateral pointing acoustic beams.

## 4.8 - LoVe transect

Geir Pedersen (IMR)

### Objective

The objective of this task was to 1) perform the standard IMR transect across the LoVe Ocean Observatory. The transect is covered four times per year and includes echosounding, ADCP, and CTD. An additional objective was to visually characterize the scattering layer across the transect using the Deep Vision system.

### Method

The LoVe transect was performed from station 1 to station 6 (30.11.2022) with

- a. Echosounders running standard IMR broadband settings and RDI long and short range ADCP
- b. Deep Vision, which was deployed (IMR VITO pelagic sampling trawl) throughout the transect with a nascent/descent speed of approximately 10-15 m/min covering surface to seafloor (as close as practical). From station 5 Deep Vision profiled 0-500 m. Deep Vision was deployed twice in two five-hour sessions with battery swap.

The LoVe transect was performed from station 6 to station 1 (01.12.2022) with

- c. echosounders running standard IMR broadband settings
- d. CTD casts from surface to seafloor at stations 6-1

Table 10. Description of the standard transect and sampling procedures (in Norwegian).

2019 LoVe (Lofoten - Ves terålen)					Planktonprøvetaking STANDARD på faste salt i Norskehavet				Planteplankton		Dyreplankton	Trål	
Fast st.nr.	Toktets st.nr.	Distanse N. mil	Bredde	Lengde	Ca bunndyp i m*	CTD Fluoresc.	Nærings-salter	Klorofyll	Høv Algehøv	Dire kte fra CTD	Høv WP-2	Åkratrål	Makroplanktontrål
1			68° 52.0 N	14° 30.0 E	230	0-burn	standard-dyp	100 - 0 m	30 - 0 m	10 m	200 - 0 m		
2			69° 54.7 N	14° 24.5 E	230	0-burn	standard-dyp	100 - 0 m	30 - 0 m	10 m	200 - 0 m	Burn - 0 m	Burn - 0 m <sup>4,5</sup>
3			69° 02.5 N	14° 17.0 E	239	0-burn	standard-dyp	100 - 0 m	30 - 0 m	10 m	200 - 0 m		
4			69° 05.0 N	14° 14.4 E	200	0-burn	standard-dyp	100 - 0 m	30 - 0 m	10 m	200 - 0 m		
5			69° 09.2 N	14° 01.6 E	1530	0-burn	standard-dyp	100 - 0 m	30 - 0 m	10 m	200 - 0 m		1000 - 0 m <sup>4,5</sup>
6			69° 16.3 N	13° 47.0 E		0-burn	standard-dyp	100 - 0 m	30 - 0 m	10 m	200 - 0 m		1000 - 0 m <sup>4,5</sup>

Note 1: **Alltid:** Alle Stasjoner: Ekkolodd og ADCP kjøres på standard måte. NB: Fint om dere setter 70 kHz loddet i passiv når dere passerer plattformen på st. 2.

Note 2: **Førsteprioritet er å foreta CTD og biologisk prøvetaking på stasjon 2.** Innsamling på øvrige stasjoner hvis det er tid og utstyret tilgjengelig om bord.

Note 3: Stasjonene 1-3 er de viktigste, og ellers prøver man så langt tiden rekker å gjennomføre de andre.

Note 4: Det ønskes et trålhål i området ved plattformen Node 1 (st. 2) for å få en oversikt av hva som er i vannsøylen uavhengig av mengden registrering. Bruk Åkratrål og konsentrert trålingen der registreringen er størst, vær forsiktig og ikke trål over instrumentplattformen med denne trålen. Det er av interesse å ta trålprøver av interessante registreringer observert på skipets ekkolodd. Bruk gjerne andre tråler dersom det er om bord, for eksempel Makroplanktontrål.

Note 5: Etter behov brukes også planktonhåver og krilltrål, spesielt i perioder man forventer egg, larver og yngel.

Kun på økosystemtokt

The westward transect was covered at vessel speed at three knots, with Deep Vision performing a V-shaped coverage of the water column (ascent/decent approximately 10 m/min), EK80 and ADCP data were collected concurrently with the Deep Vision data. The eastward transect was performed at normal survey speed at approximately 10 knots, with CTD stations along the transect (stations 6-1) as described in Table 10. Broadband acoustic data was collected according to the standard IMR settings as well as ocean current measurements (ADCPs). The cable transect and acoustic vessel transect are shown in Figure 31.

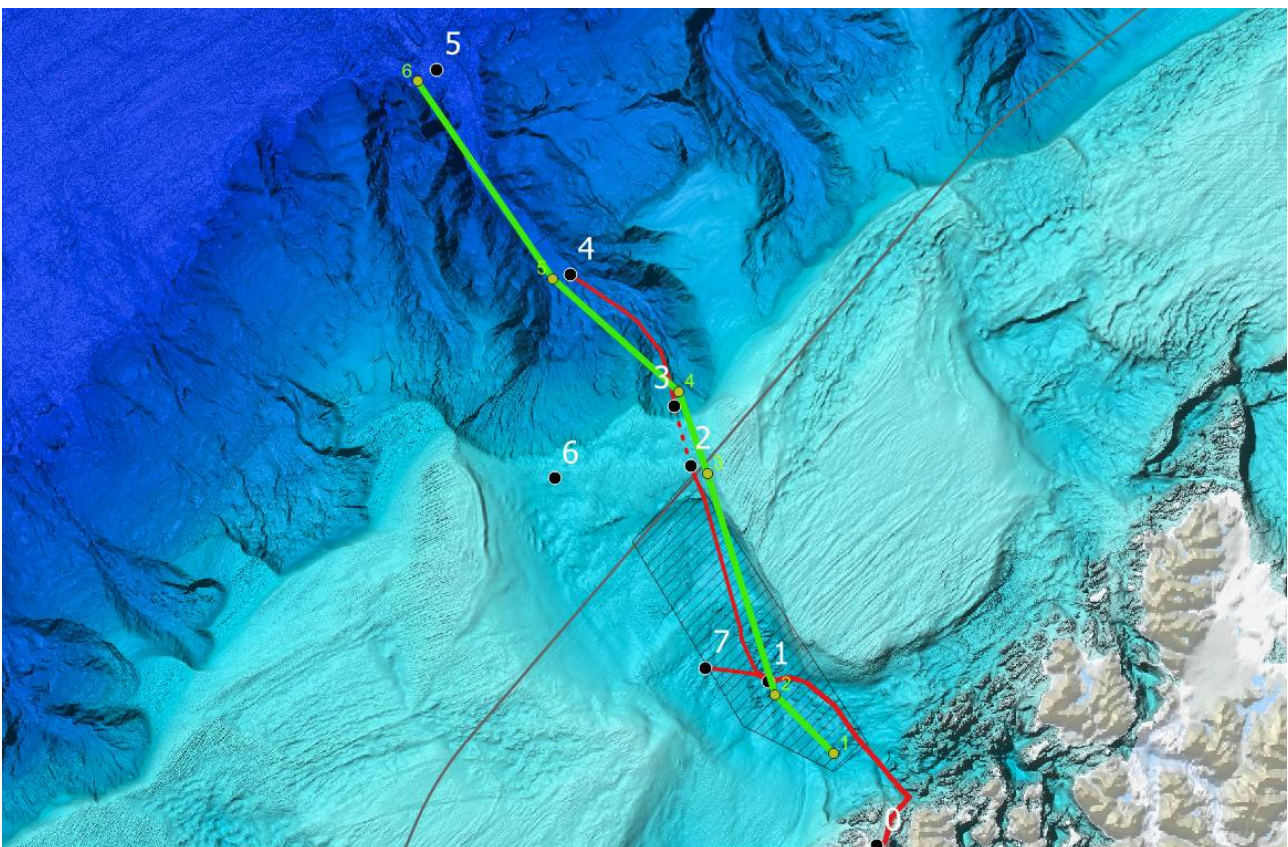


Figure 31. LoVe cable transect (red line) and acoustic/optic transect (green line).

## Preliminary results

The standard transect was successfully completed twice providing data to IMR LoVe time series database and CRIMAC (Figure 32). The first transect collected echosounder, ADCP and biological data (DeepVision). Figure 33 shows the path of the Deep Vision and example images.

The data will be used to characterize dominant scattering layers at LoVe using broadband (EK80) and imaging (DeepVision). Further we will explore the capabilities of LoVe (discrete nodes with single frequency echosounder) to characterize these layers. Additional related questions are i) what the difference in is characterization power of LoVe and research vessel, do we observe the same (LoVe, Vessel, Deep Vision)?, ii) at what range from the nodes along the transects does the nodes provide “representative” observations?, iii) how representative are vessel observations at LoVe, vessel “snapshot” vs LoVe time series?

The second completion of the LoVe transect (Stations 6-1) consisted of broadband acoustic data collection with CTD and water sampling at the six stations (Figure 32, Figure 34). The acoustic and water column data will be used to investigate the capabilities of broadband acoustics to characterise the physical properties of the water column.

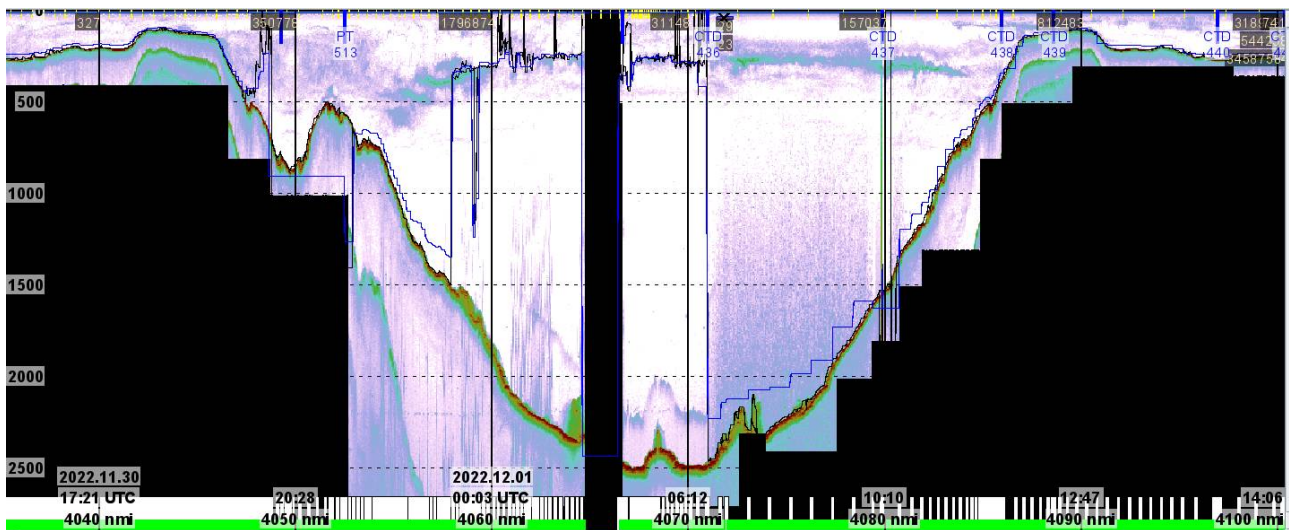


Figure 32. Echosounder data from LoVe transect.

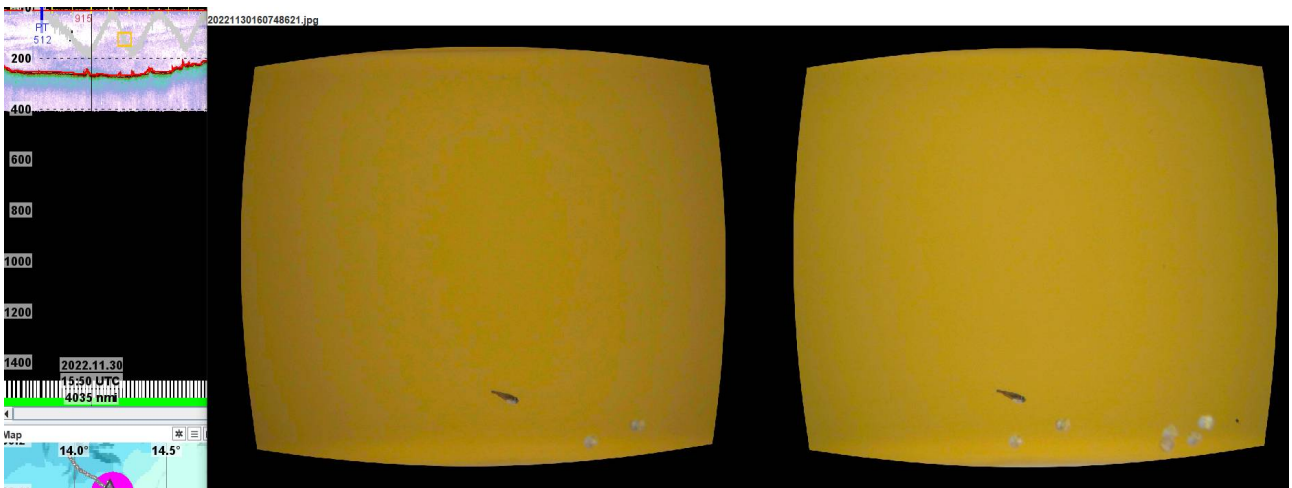
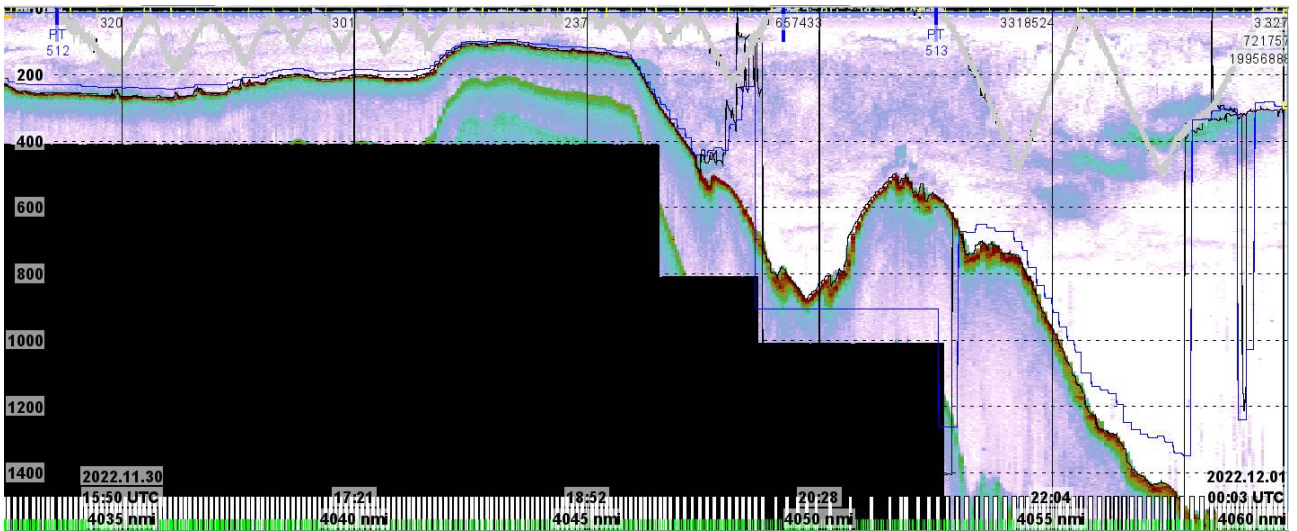


Figure 33. Love transect, acoustic data and Deep Vision path (upper panel), example Deep Vision images (lower panel).

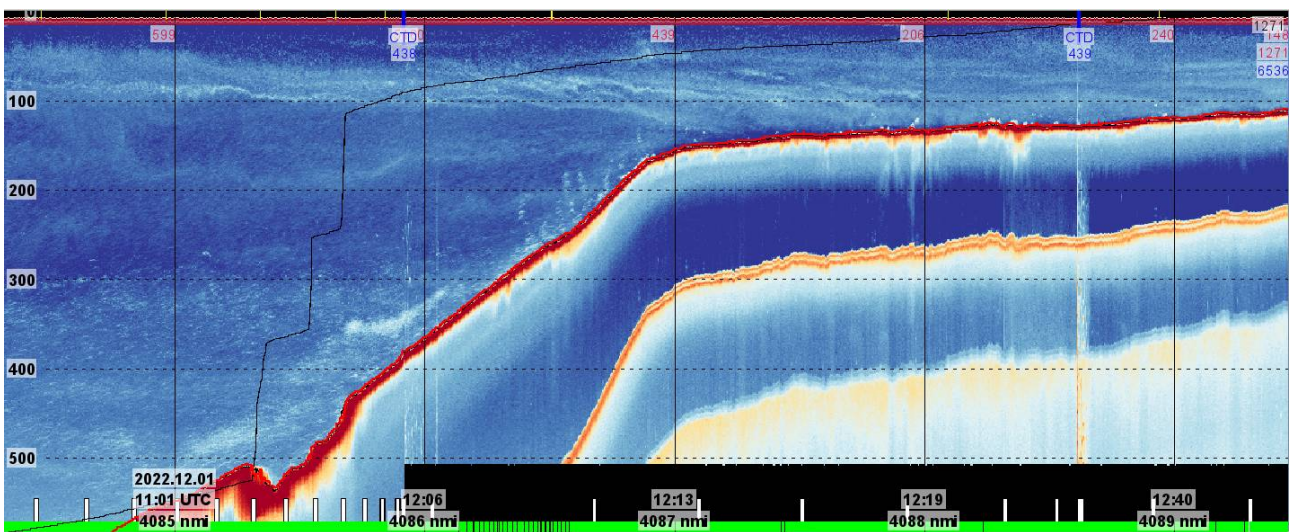


Figure 34. Shelf break crossing with CTD stations.

## 4.9 - Broadband gas seep detection and quantification

Geir Pedersen (IMR)

### Objective

Known methane seeps are located around LoVe Node 7, and the objective of this task was to collect broadband echosounder data of natural methane seeps.

### Method

A survey grid was laid out covering Node 7 (Figure 35). GO Sars collected broadband data from both the EK80 and EC150. When plumes were located (e.g. close to Node 7) the plume was investigated further by placing the ship on top of the seep and collecting additional broadband echosounder (EK80) and ADCP (EC150) data (Figure 36).

The data will be scrutinized in the CRIMAC task on quantification of gas seeps, using this as an additional data set for testing methods for broadband characterization of methane seep using vessel and observatory based broadband acoustics (GO Sars broadband data, LoVe broadband data (70kHz), single bubble/aggregation models), and vessel based ADCP with narrowbeam vertical echosounder (EC150).

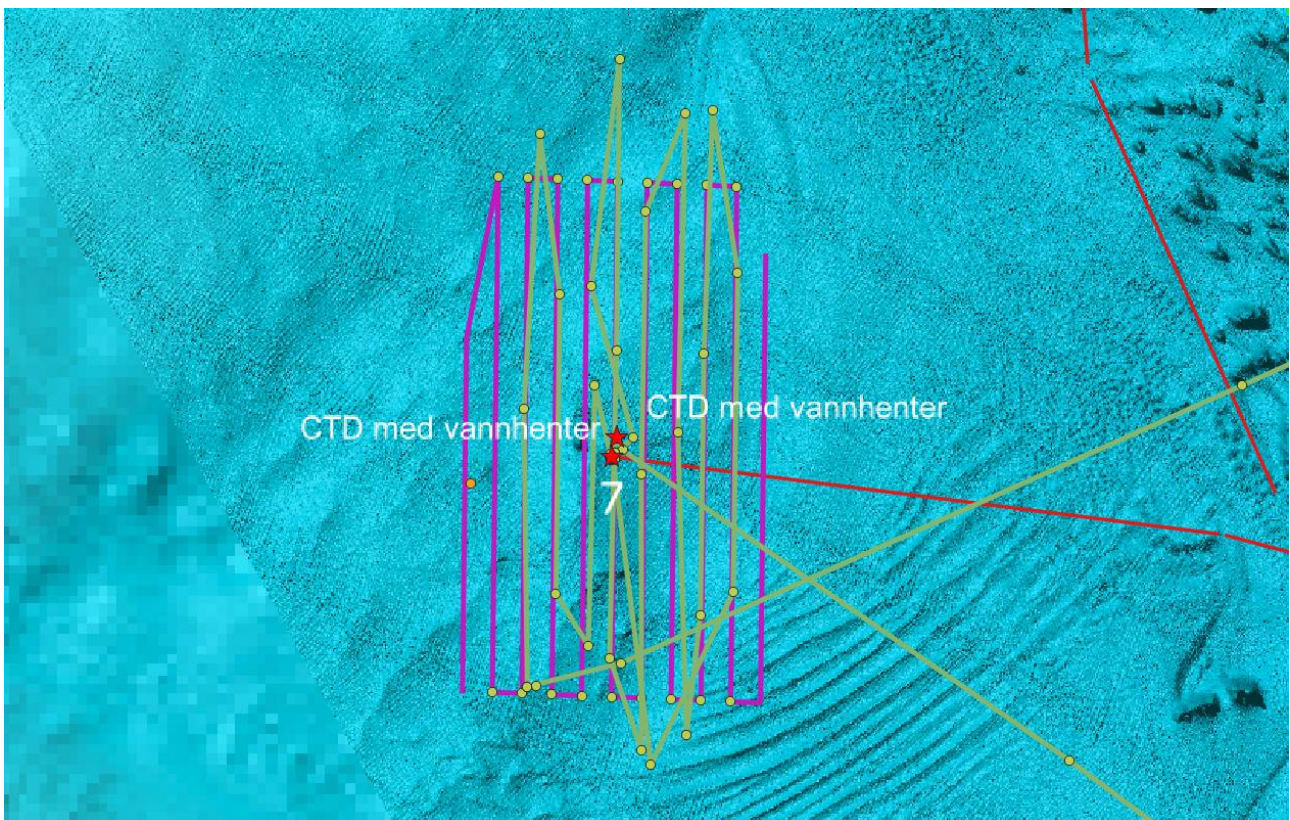


Figure 35. Transect outline (purple), actual tracks (green), LoVe Ocean Observatory node (7).

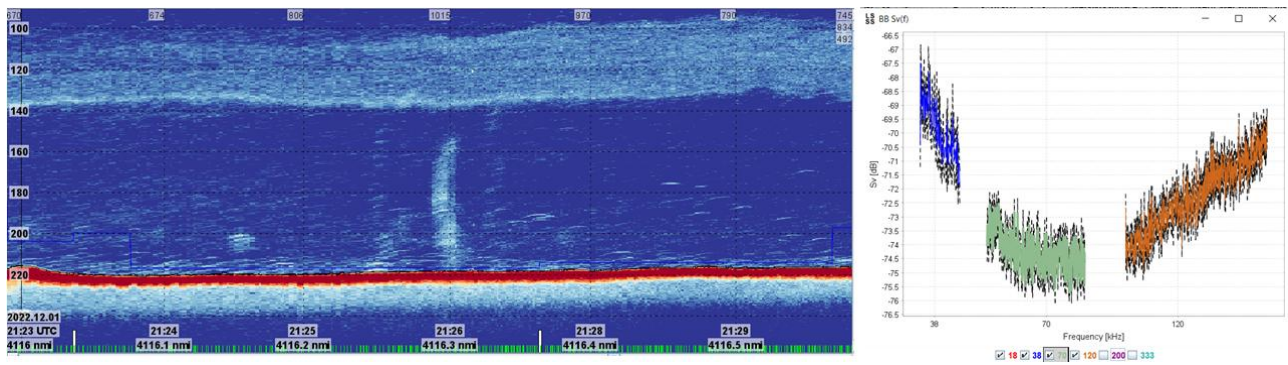


Figure 36. Node 7 methane seep and broadband frequency response (38, 70, 120).



## 5 - References

Allken, V., Handegard, N.O., Rosen, S., Schreyeck, T., Mahiout, T., Malde, K., 2019. Fish species identification using a convolutional neural network trained on synthetic data. *ICES Journal of Marine Science* 76, 342–349. <https://doi.org/10.1093/icesjms/fsy147>

Demer, D. 2015. Calibration of acoustic instruments. ICES Cooperative research report No.326, International Council for Exploration of the Sea.

Korneliussen, R. J., Diner, N., Ona, E., Berger, L., and Fernandes, P. G. 2008. Proposals for the collection of multifrequency acoustic data. *ICES Journal of Marine Science*, 65: 982–994.

Ona, E., Zhang, G., Pedersen, G., and Johnsen, E. 2020. In situ calibration of observatory broadband echosounders. *ICES Journal of Marine Science*, 77: 2954–2959.

## 6 - Data organization

The data are organized in accordance with the IMR data organization procedure. In this section the placement of additional, non-standard, data sets are described.

### ACOUSTIC

Data locations for ship EK80 and EC150-3C ADCP / echosounder calibrations:

*S2022115\_PGOSARS\_4174\ACOUSTIC\EK80\EK80\_CALIBRATION*

*S2022115\_PGOSARS\_4174\PHYSICS\ADCP\ES150\_KHZ*

### OBSERVATION PLATFORMS

*S2022115\_PGOSARS\_4174\OBSERVATION\_PLATFORMS\POLEMOUNTEDEK80*

This is the location for the pole mounted EK80 data.

*S2022115\_PGOSARS\_4174\OBSERVATION\_PLATFORMS\FOCUS2*

This is the location for the data collected with the towed underwater vehicle (FOCUS) with the following subfolders: VIDEO (FOCUS camera) and MESOTECH (scanning sonar) with an additional subfolder for each trawl haul (496 and 502).

*S2022115\_PGOSARS\_4174\OBSERVATION\_PLATFORMS\WBAT\WBAT\_EK80\_RAWDATA*

This is the location for the raw data from WBAT attached in the trawl. Subfolders for each trawl haul. The mission plans and a description of how the wbat was mounted in the trawl are also stored in this location.

### BIOLOGY

*S2022115\_PGOSARS\_4174\BIOLOGY\CATCH\_MEASUREMENTS\*

This is the location for the biological data related to the acoustic length measurements (23307, 23307 and 23308), where also the height and width of the fish were measured. The data is recorded in the file:

*S2022115\CRIMAC\_widthandheightmeasurements.xlsx*

with an ID field that corresponds to the ID field in the NMDbiotic database.

*S2021111\_PGOSARS\_4174\BIOLOGY\CATCH\_MEASUREMENTS\OTHER\_MULTIMEDIA\GOPRO\_TRAWL*

GOPRO videos from trawl are stored in this location. Subfolder for each trawl haul including description of placement

*S2022115\_PGOSARS\_4174\BIOLOGY\CATCH\_MEASUREMENTS\OTHER\_MULTIMEDIA\DARKVISION  
CAMERA*

Darkvision camera attached opposite to wbat in trawl videos are stored in this location. Subfolder for each trawl haul. Data have been processed using videoprostprocessing.py

*S2022115\_PGOSARS\_4174\BIOLOGY\CATCH\_MEASUREMENTS\DEEP\_VISION*

Deep Vision data are stored in this location. Subfolder for each trawl haul (Deep Vision session, date and time when logging started)

*S2022115\_PGOSARS\_4174\BIOLOGY\TRAWL\_SENSORS\SCANMAR*

Trawl sensor data are stored in this location. Scanmar data were collected and stored both from the "old" SCANBAS system and the "new" Scanmar 365 system. Continuous nmea strings were extracted from both systems as well as datafiles corresponding to each station. For the "old" system station data are also parsed into tab and semicolon delimited files.

" OLD" SCANBAS system

*S2022115\_PGOSARS\_4174\BIOLOGY\TRAWL\_SENSORS\SCANMAR\Scanbas*

" New" Scanmar 365 system

*S2022115\_PGOSARS\_4174\BIOLOGY\TRAWL\_SENSORS\SCANMAR\Scanmar\_365*

*S2022115\_PGOSARS\_4174\EXPERIMENTS\GPS\_GPX*

GPS log (.gpx files with fix every second, only leg 1 of cruise).

These files can be used to quickly find location at any time during leg 1 of the cruise (22-26.11). They were collected using Shale's private GPS unit (Garmin GPSmap 60CSx). The GPS unit turned itself off from 00:00:00-10:12:30 on 25.11, so no fixes are available during that time period.



## HAVFORSKNINGSINSTITUTTET

Postboks 1870 Nordnes

5817 Bergen

Tlf: 55 23 85 00

E-post: [post@hi.no](mailto:post@hi.no)

[www.hi.no](http://www.hi.no)